

VAL-MS 385/80/1+1-FM - Type 2 surge arrester



2921284

<https://www.phoenixcontact.com/us/products/2921284>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Type 2 surge protective device for 3-conductor power supply systems (L1, N, PE), with plug latching and remote indication contact.

Your advantages

- Quality proven millions of times over in the widest range of applications
- Rapid installation with bridges, thanks to industry-standard overall width of 1 HP
- Easy testing and insulation measurement, thanks to pluggable protection modules
- Wide range of applications due to various nominal voltages
- High degree of modularity provides individual solutions for every application

Commercial data

Item number	2921284
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CL1322
Catalog page	Page 49 (C-6-2013)
GTIN	4046356280006
Weight per piece (including packing)	330.8 g
Weight per piece (excluding packing)	330.9 g
Country of origin	DE

VAL-MS 385/80/1+1-FM - Type 2 surge arrester



2921284

<https://www.phoenixcontact.com/us/products/2921284>

Technical data

Product properties

Product type	Surge arrester
Product family	VALVETRAB MS
IEC test classification	II
	T2
EN type	T2
IEC power supply system	TT
	TN-C
	TN-S
Type	DIN rail module, two-section, divisible
Surge protection fault message	Optical, remote indicator contact

Insulation characteristics

Overvoltage category	III
Pollution degree	2

Electrical properties

Nominal frequency f_N	50 Hz (60 Hz)
-------------------------	---------------

Indicator/remote signaling

Connection name	Remote fault indicator contact
Switching function	Changeover contact
Operating voltage	5 V AC ... 250 V AC
	30 V DC
Operating current	5 mA AC ... 1.5 A AC
	1 A DC

Connection data

Connection method	Screw connection
Screw thread	M5
Tightening torque	3 Nm (1.5 mm ² ... 16 mm ²)
	4.5 Nm (25 mm ² ... 35 mm ²)
Stripping length	16 mm
Conductor cross section flexible	1.5 mm ² ... 25 mm ²
Conductor cross section rigid	1.5 mm ² ... 35 mm ²
Conductor cross section AWG	15 ... 2
Connection method	Fork-type cable lug
Conductor cross section flexible	1.5 mm ² ... 16 mm ²

Remote fault indicator contact

Connection method	Plug-in/screw connection via COMBICON
Screw thread	M2
Tightening torque	0.25 Nm

VAL-MS 385/80/1+1-FM - Type 2 surge arrester




2921284

<https://www.phoenixcontact.com/us/products/2921284>

Stripping length	7 mm
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section rigid	0.14 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16

Dimensions

Dimensional drawing	
Width	35.6 mm
Height	96.8 mm
Depth	77.5 mm (incl. DIN rail 7.5 mm)
Horizontal pitch	2 Div.

Material specifications

Color	black (RAL 9005)
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6/PBT
Material group	I
Housing material	PA 6.6 PBT

Protective circuit

Mode of protection	L-N
	L-PE
	N-PE
Direction of action	1L-N & N-PE
Nominal voltage U_N	240 V AC (TN-S)
	240 V AC (TT)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous operating voltage U_C (L-N)	385 V AC
Maximum continuous operating voltage U_C (N-PE)	264 V AC
Rated load current I_L	80 A
Residual current I_{PE}	$\leq 5 \mu A$
Standby power consumption P_C	$\leq 231.00 \text{ mVA}$
Nominal discharge current I_n (8/20) μs	40 kA
Maximum discharge current I_{max} (8/20) μs	80 kA
Impulse discharge current (10/350) μs (L-N), charge	1.25 As
Impulse discharge current (10/350) μs (L-N), specific energy	1.56 kJ/ Ω
Impulse discharge current (10/350) μs (L-N), peak current value I_{imp}	2.5 kA

VAL-MS 385/80/1+1-FM - Type 2 surge arrester



2921284

<https://www.phoenixcontact.com/us/products/2921284>

Impulse discharge current (10/350) μ s (L-PE), charge	1.25 As
Impulse discharge current (10/350) μ s (L-PE), specific energy	1.56 kJ/ Ω
Impulse discharge current (10/350) μ s (L-PE), peak current value I_{imp}	2.5 kA
Impulse discharge current (10/350) μ s (N-PE), charge	5 As
Impulse discharge current (10/350) μ s (N-PE), specific energy	25 kJ/ Ω
Impulse discharge current (10/350) μ s (N-PE), peak current value I_{imp}	10 kA
Total discharge current I_{total} (8/20) μ s	80 kA
Total discharge current I_{total} (10/350) μ s	5 kA
Follow current interrupt rating I_{fi} (N-PE)	100 A
Short-circuit current rating I_{SCCR}	25 kA
Voltage protection level U_p (L-N)	≤ 2 kV
Voltage protection level U_p (L-PE)	≤ 2 kV
Voltage protection level U_p (N-PE)	≤ 1.7 kV
Residual voltage U_{res} (L-N)	≤ 2 kV (at I_n)
	≤ 1.3 kV (at 10 kA)
	≤ 1.2 kV (at 5 kA)
	≤ 1.15 kV (at 3 kA)
Residual voltage U_{res} (L-PE)	≤ 2 kV (at I_n)
	≤ 1.5 kV (at 10 kA)
	≤ 1.4 kV (at 5 kA)
	≤ 1.3 kV (at 3 kA)
Residual voltage U_{res} (N-PE)	≤ 0.6 kV (at I_n)
	≤ 0.5 kV (at 10 kA)
	≤ 0.5 kV (at 5 kA)
	≤ 0.4 kV (at 3 kA)
TOV behavior at U_T (L-N)	480 V AC (5 s / withstand mode)
	457 V AC (120 min / withstand mode)
TOV behavior at U_T (N-PE)	1200 V AC (200 ms / withstand mode)
Response time t_A (L-N)	≤ 25 ns
Response time t_A (L-PE)	≤ 100 ns
Response time t_A (N-PE)	≤ 100 ns
Max. backup fuse with V-type through wiring	80 A (gG - 16 mm ²)
Max. backup fuse with branch wiring	250 A (gG)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (only when all terminal points are used)
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	30g (Half-sine / 11 ms / 3x $\pm X$, $\pm Y$, $\pm Z$)

VAL-MS 385/80/1+1-FM - Type 2 surge arrester



2921284

<https://www.phoenixcontact.com/us/products/2921284>

Vibration (operation)	7.5g (10 ... 500 Hz / 2.5 h / X, Y, Z)
-----------------------	--

Approvals

UL specifications

Maximum continuous operating voltage MCOV (L-N)	385 V AC
Maximum continuous operating voltage MCOV (L-G)	385 V AC
Maximum continuous operating voltage MCOV (N-G)	264 V AC
Nominal discharge current I_n (L-N)	20 kA
Nominal discharge current I_n (L-G)	20 kA
Nominal discharge current I_n (N-G)	20 kA
Mode of protection	L-N
	L-G
	N-G
Nominal voltage	240 V AC
Power distribution system	Single phase
Nominal frequency	50/60 Hz
Measured limiting voltage MLV (L-N)	2710 V
Measured limiting voltage MLV (L-G)	3730 V
Measured limiting voltage MLV (N-G)	2590 V
SPD Type	4CA

UL indicator/remote signaling

Operating voltage	125 V AC
AC operating current	1 A AC

UL connection data

Tightening torque	30 lb _F ·in.
Conductor cross section AWG	10 ... 2

Standards and regulations

Standards/specifications	IEC 61643-11
Note	2011
Standards/specifications	EN 61643-11
Note	2012

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------


VAL-MS 385/80/1+1-FM - Type 2 surge arrester

2921284


<https://www.phoenixcontact.com/us/products/2921284>

Drawings

Circuit diagram

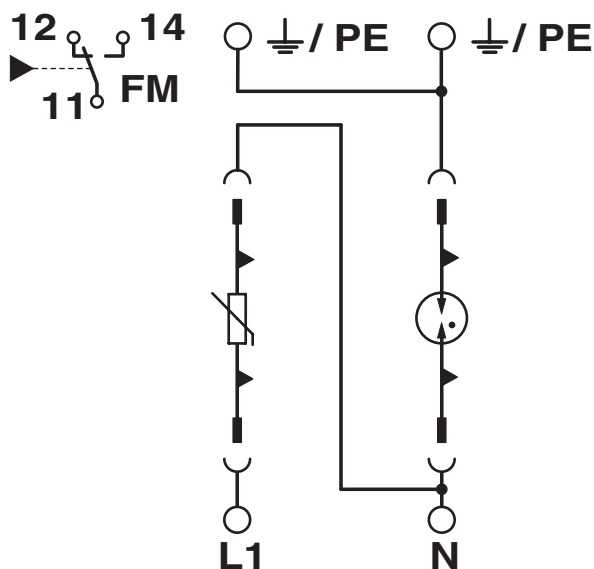

Dimensional drawing

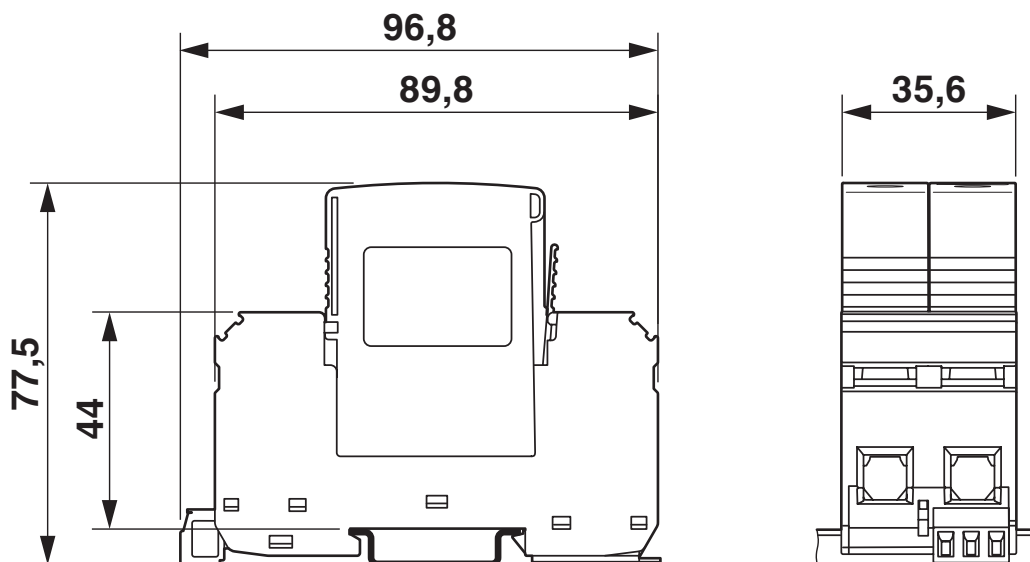

VAL-MS 385/80/1+1-FM - Type 2 surge arrester



2921284

<https://www.phoenixcontact.com/us/products/2921284>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2921284>

	cUL Recognized Approval ID: FILE E 330181
	UL Recognized Approval ID: FILE E 330181
	IECEE CB Scheme Approval ID: AT 3003
	EAC Approval ID: RU C-DE.*09.B.00169
	CCA Approval ID: NTR-AT 1955
	KEMA-KEUR Approval ID: 2171147.01
	DNV GL Approval ID: TAE00001N9
	UAE-RoHS Approval ID: 22-09-51251
	cULus Recognized

VAL-MS 385/80/1+1-FM - Type 2 surge arrester



2921284

<https://www.phoenixcontact.com/us/products/2921284>

Classifications

ECLASS

ECLASS-11.0	27130805
ECLASS-13.0	27171202

ETIM

ETIM 9.0	EC000941
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

VAL-MS 385/80/1+1-FM - Type 2 surge arrester



2921284

<https://www.phoenixcontact.com/us/products/2921284>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

VAL-MS 385/80/1+1-FM - Type 2 surge arrester



2921284

<https://www.phoenixcontact.com/us/products/2921284>

Accessories

VAL-MS 385/80 ST - Type 2 surge protection plug

2920353

<https://www.phoenixcontact.com/us/products/2920353>



Type 2 surge protection plug with varistor for VAL-MS 385/80/..., thermal monitoring, visual fault warning.

F-MS 80 ST - Type 2 surge protection plug

2921307

<https://www.phoenixcontact.com/us/products/2921307>



Type 2 surge protection plug with N-PE total current spark gap.

VAL-MS 385/80/1+1-FM - Type 2 surge arrester

2921284

<https://www.phoenixcontact.com/us/products/2921284>



SZK PZ2 VDE - Screwdriver

1206463

<https://www.phoenixcontact.com/us/products/1206463>



Screwdriver, PZ crosshead, VDE insulated, size: PZ 2 x 100 mm, 2-component grip, with non-slip grip

VAL-MS 385/80 ST - Type 2 surge protection plug

2920353

<https://www.phoenixcontact.com/us/products/2920353>



Type 2 surge protection plug with varistor for VAL-MS 385/80/..., thermal monitoring, visual fault warning.

VAL-MS 385/80/1+1-FM - Type 2 surge arrester

2921284

<https://www.phoenixcontact.com/us/products/2921284>



F-MS 80 ST - Type 2 surge protection plug

2921307

<https://www.phoenixcontact.com/us/products/2921307>



Type 2 surge protection plug with N-PE total current spark gap.

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com