


© COPYRIGHT 1997 BY SPC TECHNOLOGY. ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS					DOC. NO.	SPC-FD05, Total Pages: 2
DOP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE
428	B	CHANGE ELECTRONIC FILE NAME	DJC	2/12/98	JC	2/17/98
668	C	CORRECT TITLE	DJC	11/16/98	JC	11/17/98

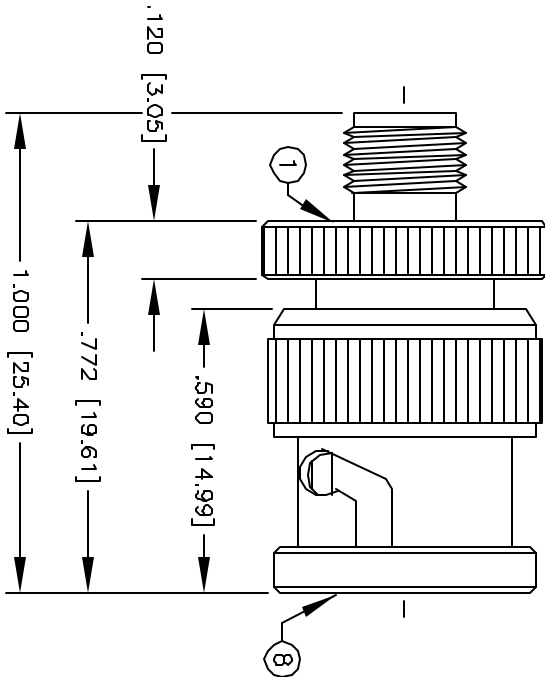

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 335 VRMS @ SEA LEVEL
FREQUENCY RANGE: 0-4 GHz

8	SHELL	1	BRASS	GOLD
7	WASHER	1	BRASS	GOLD
6	SPRING	1	SK-5	NONE
5	SPLIT LOCK WASHER	1	BRASS	GOLD
4	GASKET	1	S.I. RUBBER	BRIGHT ORANGE
3	DIELECTRIC	1	TEFLON	NONE
2	CONTACT	1	PHOSPHOR BRONZE	GOLD
1	BODY	1	BRASS	GOLD
ITEM	DESCRIPTION	QTY	MATERIAL	FINISH

DISCLAIMER
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL OBTAIN THE SERVICES OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY
CERTIFIED, IT 6060-1995

DRAWN BY:		DATE:	DRAWING TITLE:		
DANIEL CAREY		4/2/97	SMA FEMALE TO BNC MALE ADAPTER		
CHECKED BY:		DATE:	SIZE	DWG. NO.	CAD FILE
JOHN COLE		4/8/97	A	8589-0859	16N2741.DWG
APPROVED BY:		DATE:	SCALE:	NTS	SHEET: 1 OF 1
BRETT BRAATZ		4/16/97	U.O.M.: INCHES [mm]		

DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.