

Actuator

704.411.010I

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/704.411.010I>

Your product:



704.411.010I Actuator

FRONT

Front bezel colour:	Black
Front dimension:	Ø 35 mm
Front bezel material:	Aluminium

MOUNTING

Design:	flush
Mounting cut-out:	Ø 30.5 mm

OPERATING-/INDICATION PART

Lever colour:	Black
Lever material:	plastic
Lever shape:	short

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
------------	---

MECHANICAL CHARACTERISTIC

Weight:	0.056 kg
Switching positions:	2 positions
Mechanical lifetime:	≤2.5 Mio. cycles of operation
Switching action:	Rest - Maintained
Switching angle:	90° right

AMBIENT CONDITION

IP Protection:	IP65 front side
Storage temperature:	– 40 °C ... + 85 °C
Operating temperature:	– 40 °C ... + 55 °C


OTHER

Short Description:	Actuator, Ø 30.5 mm, Ø 35 mm, optional illuminative, Black, short, Black, Aluminium, anodised, Rest - Maintained
---------------------------	--


Hints:	Max. 3 switching elements can be clipped on
---------------	---

max. number of switching elements:	3
---	---


Wiring diagrams:

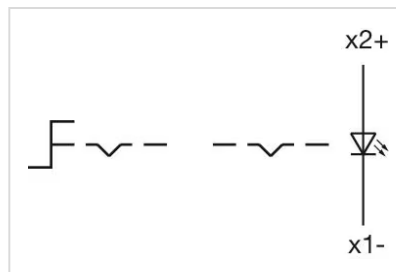

Switching positions:

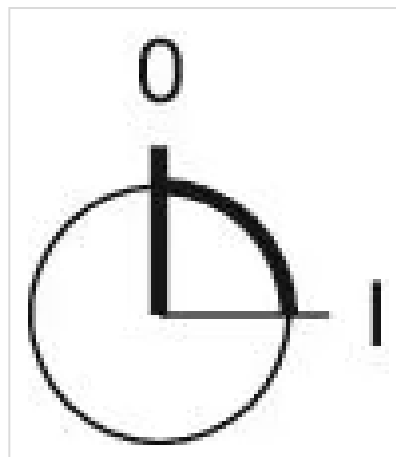


Mounting cut-outs:

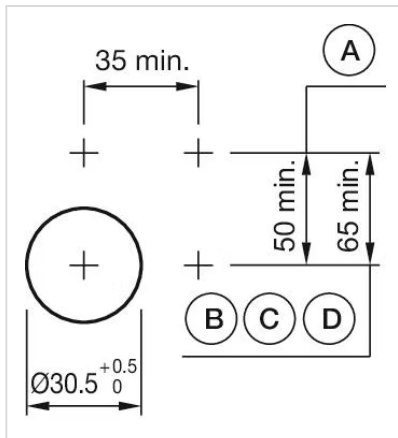

A = Screw terminal
 B = Push-in terminal (PIT)
 C = Plug-in terminal 6.3 mm x 0.8 mm
 D = Double plug-in terminal 6.3 mm x 0.8 mm

Dimension drawings:

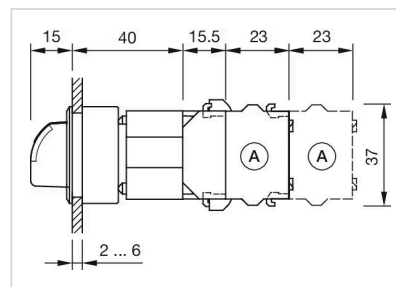

X = Screw terminal