

QPD W3PE2,5 M25 0,5 GY - Panel feed-through



1423966

<https://www.phoenixcontact.com/us/products/1423966>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Panel feed-through, product family: QPD, connection method: Single wires (Welded-on), number of positions: 3+PE, M25, Pin, 1 mm² ... 2.5 mm², 690 V, 20 A, PA, gray, without QUICKON nut, coding: coded, 2.5 mm², wires cut flat at the end, cable length: 0.5 m

Your advantages

- Innovative and time saving - QUICKON fast connection for time saving of up to 80 % for on-site connection
- Robust throughout: housing with IP68/IP69K and IK07 protection for a wide range of applications
- Safer connection with mechanical coding to protect against mismatching, and touch-proof protection in accordance with DIN EN 0105
- Efficient - by using panel feed-throughs, devices no longer need to be opened in order to connect cables

Commercial data

Item number	1423966
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF50
Product key	BF6ABB
GTIN	4055626365848
Weight per piece (including packing)	88.6 g
Weight per piece (excluding packing)	88 g
Customs tariff number	85444290
Country of origin	PL

QPD W3PE2,5 M25 0,5 GY - Panel feed-through



1423966

<https://www.phoenixcontact.com/us/products/1423966>

Technical data

Product properties

Product type	Panel feed-through
Product family	QPD
Type	QPD 4x2,5
Number of positions	4
Connection profile	3+PE
Position marking	1, 2, 3, PE
Number of connections	10
Number of connections per position	1
Coding	coded

Data management status

Article revision	03
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Connection data

Connection technology

Connection method On the device side	Single wires (Welded-on)
Frequency of connections between conductors of the same cross section	max. 10

Conductor connection

Conductor cross section flexibel	1 mm ² ... 2.5 mm ²
Conductor cross section solid	1 mm ² ... 2.5 mm ²
Connection cross section AWG	16 ... 14
Tightening torque Union nut	10 Nm
Tightening torque Locking nut	5 Nm

Dimensions

Dimensional drawing	
Width	30 mm
Height	30 mm
Length	47.7 mm
Diameter	30 mm

Electrical properties

QPD W3PE2,5 M25 0,5 GY - Panel feed-through



1423966

<https://www.phoenixcontact.com/us/products/1423966>

Rated surge voltage (II/2)	6 kV
Rated surge voltage (III/2)	6 kV
Rated surge voltage (III/3)	6 kV
Rated current	20 A
Contact resistance	< 3 mΩ
rated voltage (II/2)	1000 V
rated voltage (III/2)	690 V
Rated voltage (III/3)	690 V
Nominal voltage U_N	690 V AC
	690 V DC
Nominal current I_N	20 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	max. 50
-----------------------------	---------

Material specifications

Color	light gray (RAL 7035)
Material Housing	PA
Material Contact	Cu
Material Contact surface	silver-plated
Flammability rating according to UL 94	V0
Material wire insulation	PVC/PE/TPE/rubber

Cable/line

Cable length	0.5 m
Structure of individual litz in acc. with VDE 0295 / smallest wire diameter	VDE 0295 class 1 to 6/min. 0.15 mm
Wire diameter including insulation	2 mm ... 3.6 mm
Position marking	1, 2, 3, PE
Cable cross section	2.5 mm ²
Material wire insulation	PVC/PE/TPE/rubber
Halogen-free	yes

Mounting

Mounting type	Front mounting M25
Thread type	()

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP68 (2 m / 24 h)
	IP69K
	Touch-proof when not plugged in (IP2X)

QPD W3PE2,5 M25 0,5 GY - Panel feed-through



1423966

<https://www.phoenixcontact.com/us/products/1423966>

Impact strength	IK07
Ambient temperature (operation)	-40 °C ... 100 °C
Temperature when conductor connected	-5 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 100 °C

QPD W3PE2,5 M25 0,5 GY - Panel feed-through




1423966

<https://www.phoenixcontact.com/us/products/1423966>


Drawings

Diagram

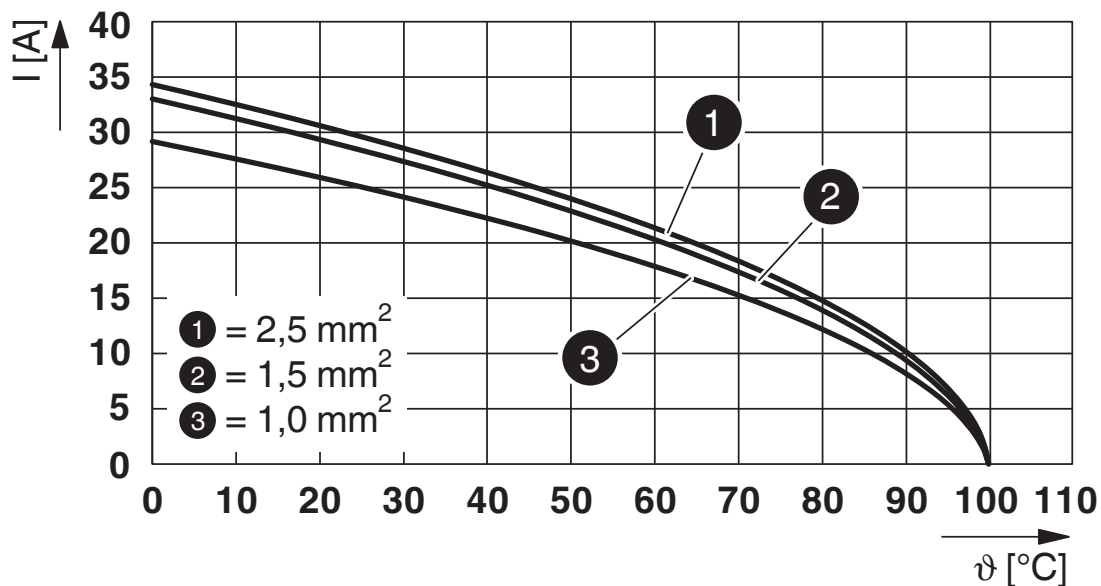

Derating diagram

Dimensional drawing

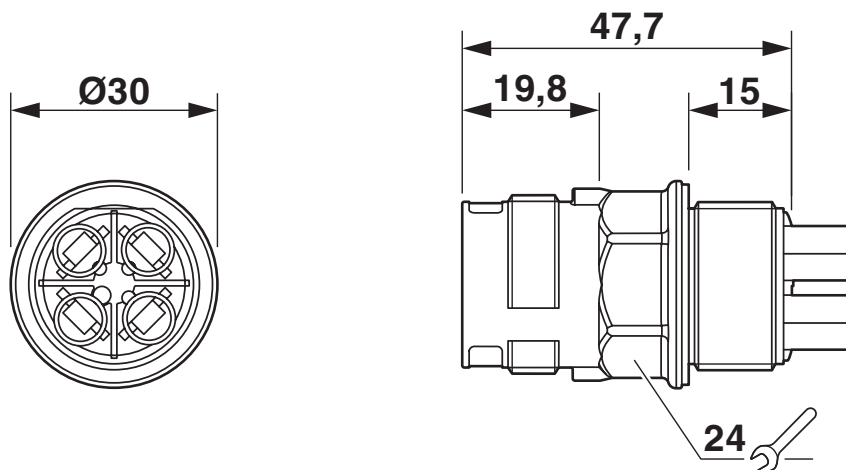


QPD W3PE2,5 M25 0,5 GY - Panel feed-through

1423966

<https://www.phoenixcontact.com/us/products/1423966>



Dimensional drawing

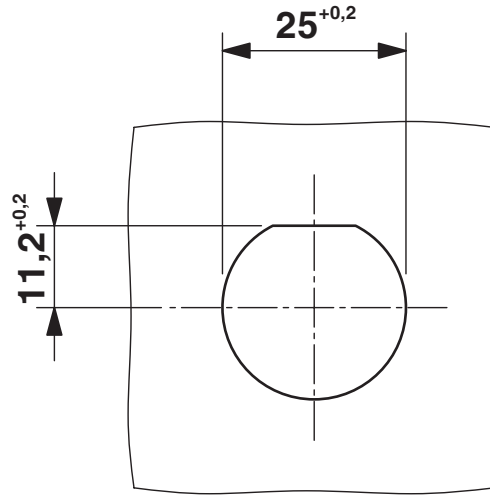

Panel cutout

QPD W3PE2,5 M25 0,5 GY - Panel feed-through



1423966


<https://www.phoenixcontact.com/us/products/1423966>

Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1423966>




IECEE CB Scheme
Approval ID: DE1-65875




EAC
Approval ID: RU C-DE.BL08.B.00511

	VDE Zeichengenehmigung Approval ID: 40029149			
		Nominal voltage U_N	Nominal current I_N	Cross section AWG
	Only flexible conductors	400 V	20 A	-
	Only rigid conductors	690 V	20 A	-
				Cross section mm^2
				1.5 - 2.5
				1.5 - 2.5



UL Listed
Approval ID: E468743



cUL Listed
Approval ID: E468743

cULus Listed

QPD W3PE2,5 M25 0,5 GY - Panel feed-through



1423966

<https://www.phoenixcontact.com/us/products/1423966>

Classifications

ECLASS

ECLASS-11.0	27440602
ECLASS-13.0	27440602
ECLASS-12.0	27440602

ETIM

ETIM 9.0	EC002566
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

QPD W3PE2,5 M25 0,5 GY - Panel feed-through



1423966

<https://www.phoenixcontact.com/us/products/1423966>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

QPD W3PE2,5 M25 0,5 GY - Panel feed-through



1423966

<https://www.phoenixcontact.com/us/products/1423966>

Mandatory accessories

Q-MU M25 - Nut

1640715

<https://www.phoenixcontact.com/us/products/1640715>

Nut (plastic) to lock the contact carrier from the inside of the device



Accessories

CP QPD 4X2,5 - Coding profile

1425950

<https://www.phoenixcontact.com/us/products/1425950>

Coding profile red, for pushing into the QUICKON dome and connector, can be positioned in 90° steps.



QPD W3PE2,5 M25 0,5 GY - Panel feed-through

1423966

<https://www.phoenixcontact.com/us/products/1423966>



QPD QSK 5X1,5 - Protective cap

1414758

<https://www.phoenixcontact.com/us/products/1414758>

Protective cap plastic, for QPD-QUICKON connection 5x 1.5 mm², IP50



QPD QSK BK 5X1,5 FS - Protective cap

1414728

<https://www.phoenixcontact.com/us/products/1414728>

Protective cap, plastic, for QUICKON connection, black, with retaining cord, IP68



QPD W3PE2,5 M25 0,5 GY - Panel feed-through



1423966

<https://www.phoenixcontact.com/us/products/1423966>

QSS 22 - Socket wrench

1670206

<https://www.phoenixcontact.com/us/products/1670206>



Allen wrench, for loosening and fastening the QUICKON union nut, WAF 22 mm

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com