REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
–	INITIAL RELEASE	02/05/02	A.D.M.

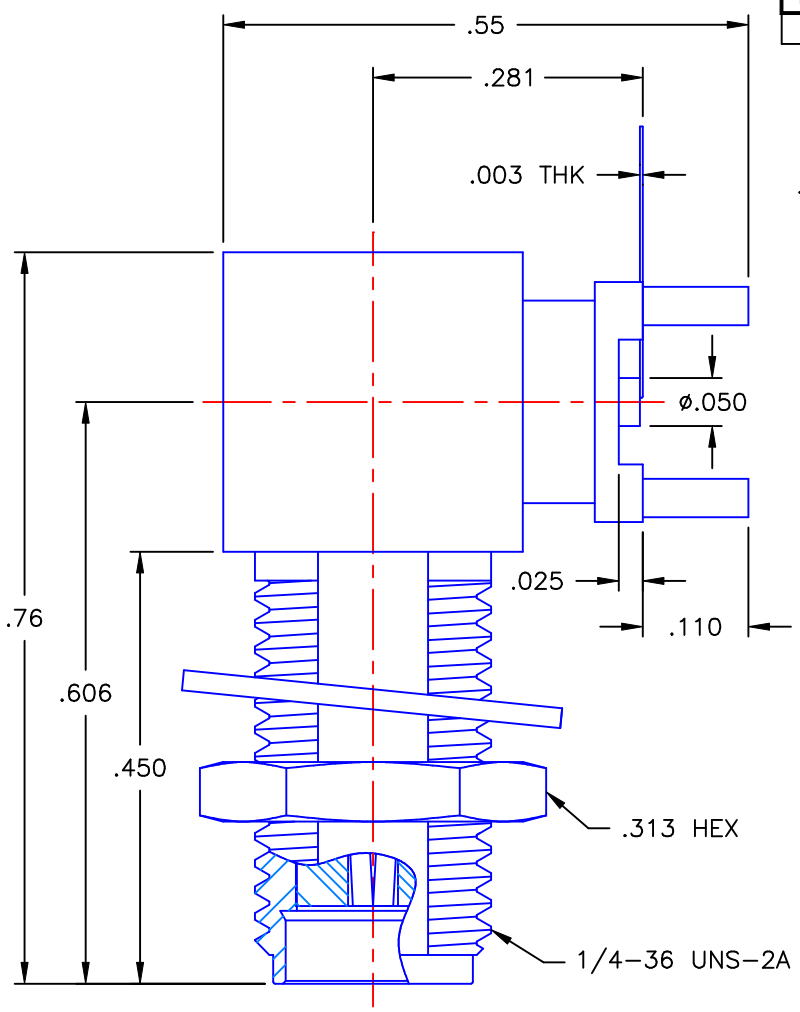

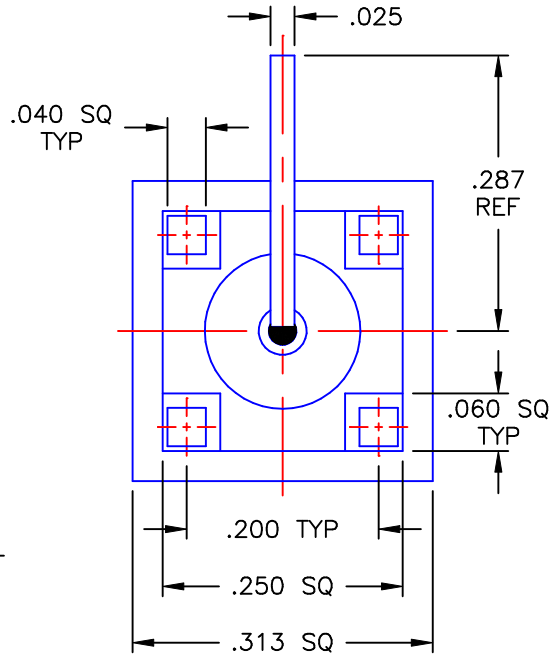

PROPRIETARY INFORMATION
NOT TO BE RELEASED
WITHOUT WRITTEN PERMISSION
FROM AN AUTHORIZED
REPRESENTATIVE OF
APPLIED ENGINEERING PRODUCTS

NOTES:

MATERIALS:

1. BODIES & LOCKNUT = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. INTERFACE CONTACT & TAB = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
4. CONTACT & CAP = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
5. LOCKWASHER = PHOSPHOR BRONZE PER ASTM B139, COPPER ALLOY C53400, TEMPER H04.

FINISHES:

1. CONTACTS = GOLD PLATE PER MIL–G–45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ–N–290.
2. CAP & LOCKWASHER = GOLD PLATE PER MIL–G–45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL–C–14550.
3. ALL OTHER METAL PARTS = GOLD PLATE PER MIL–G–45204, TYPE II, CLASS 0, GRADE C, OVER .000050 TO .00010 STRESS FREE NICKEL PER QQ–N–290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: A.D.M.	DATE 02/04/02	APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr. New Haven, CT 06513
DECIMAL / ANGLE	CHKD: D.N.	DATE 02/05/02	SMA RIGHT ANGLE JACK BULKHEAD P.C.B. MOUNT TAB RECEPTACLE
	APVD: D.J.C.	DATE 02/05/02	
REFERENCE: ORIGINATOR: A.D.M. DATE: 02/04/02	MATERIALS & FINISHES: SEE NOTES	SIZE A / FSCM NO. 19505	DWG NO. 9652–1513–003 / REV –
		SCALE 5:1	SHEET 1 OF 1

9652–1513–003

Downloaded from Arrow.com.