

General Description

The Sanrise SRC60R090B is a high voltage power MOSFET, fabricated using advanced super junction technology. The resulting device has extremely low on resistance, low gate charge and fast switching time, making it especially suitable for applications which require superior power density and outstanding efficiency.

The SRC60R090B break down voltage is 600V and it has a high rugged avalanche characteristics. The SRC60R090B is available in TO-220F, TO-263-2, TO-220C and TO-247 packages.

Features

- Ultra Low $R_{DS(ON)} = 90m\Omega @ V_{GS} = 10V$.
- Ultra Low Gate Charge, $Q_g = 90.3nC$ typ.
- Intrinsic Fast-Recovery Body Diode
- Fast switching capability
- Robust design with better EAS performance
- Non-automotive Qualified

Application

- AC/DC Power Supply
- EV Charger
- PC / Server / Telecom

Ordering Information

Circuit Type		SRC60R090B□□-□			
Package				E: Lead Free	
TF: TO-220F				G: Green	
T: TO-247				Blank: Tube	
S2: TO-263-2				TR: Tape & Reel	

Symbol

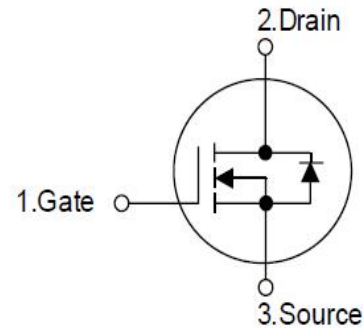


Figure 1 Symbol of SRC60R090B

Package Type

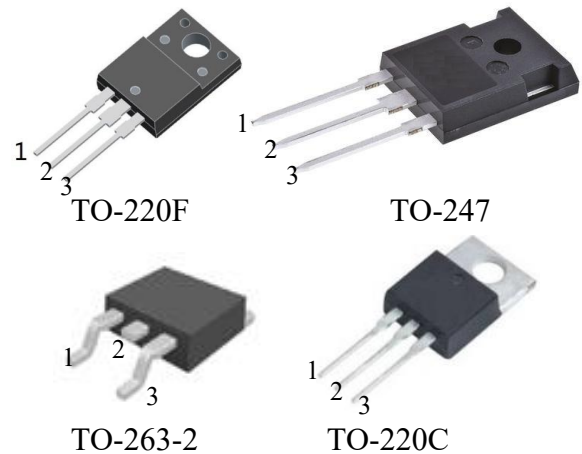


Figure 2 Package Types of SRC60R090B

Package	Part Number		Marking ID		Packing Type
	Lead Free	Green	Lead Free	Green	
TO-220F	SRC60R090BTF-E	SRC60R090BTF-G	SRC60R090BTFE	SRC60R090BTFG	Tube
TO-247	SRC60R090BT-E	SRC60R090BT-G	SRC60R090BTE	SRC60R090BTG	Tube
TO-263-2	SRC60R090BS2TR-E	SRC60R090BS2TR-G	SRC60R090BS2E	SRC60R090BS2G	Tape & Reel
TO-220C	SRC60R090BTC-E	SRC60R090BTC-G	SRC60R090BTCE	SRC60R090BTCG	Tube

Absolute Maximum Ratings

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DS}	600	V
Gate-Source Voltage		V_{GS}	±30	V
Continuous Drain Current	$T_C=25^{\circ}\text{C}$	I_D	39.5	A
	$T_C=125^{\circ}\text{C}$		17.8	
Pulsed Drain Current (Note 2)		I_{DM}	118.5	A
Avalanche Energy, Single Pulse (Note 3)		E_{AS}	550	mJ
Avalanche Energy, Repetitive (Note 2)		E_{AR}	0.6	mJ
Avalanche Current, Repetitive (Note 2)		I_{AR}	4.5	A
Continuous Diode Forward Current		I_S	39.5	A
Diode Pulse Current		$I_{S,PULSE}$	118.5	A
MOSFET dv/dt Ruggedness, $V_{DS}\leq 480\text{V}$		dv/dt	50	V/ns
Reverse Diode dv/dt, $V_{DS}\leq 480\text{V}$, $I_{SD}\leq I_D$		dv/dt	50	V/ns
Power Dissipation (TO-220F)		P_{tot}	35.7	W
Power Dissipation (TO-220C, TO-263-2, TO-247)		P_{tot}	291	W
Operating Junction Temperature		T_J	150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-55 to 150	$^{\circ}\text{C}$
Lead Temperature (Soldering, 10 sec)		T_{LEAD}	260	$^{\circ}\text{C}$

Note:

1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. Repetitive Rating: Pulse width limited by maximum junction temperature
3. $I_{AS} = 4.5\text{A}$, $V_{DD} = 60\text{V}$, $R_G = 25\Omega$, Starting $T_J = 25^{\circ}\text{C}$

Thermal characteristics

Parameter		Symbol	Min	Typ	Max	Unit
Thermal resistance, Junction-to-Case	TO-220F	R_{thJC}			3.5	$^{\circ}\text{C} / \text{W}$
	TO-220C				0.43	
	TO-263-2				0.43	
	TO-247				0.43	
Thermal resistance, Junction-to-Ambient	TO-220F	R_{thJA}			70	$^{\circ}\text{C} / \text{W}$
	TO-220C				58	
	TO-263-2				58	
	TO-247				58	

Electrical Characteristics

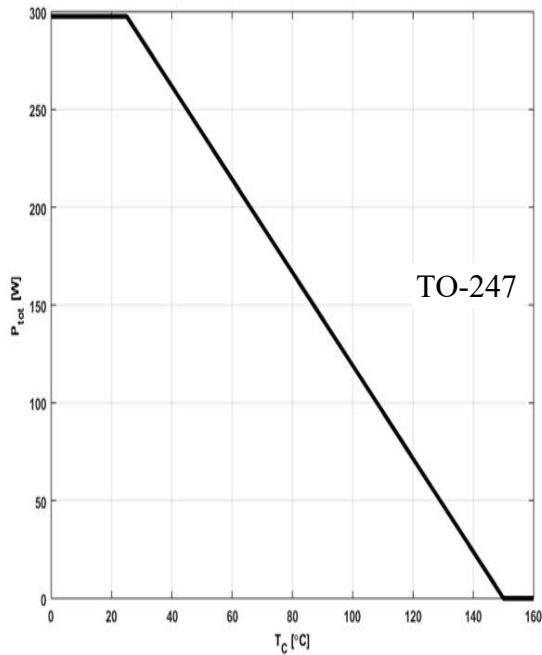
$T_J = 25^\circ\text{C}$, unless otherwise specified.

Parameter		Symbol	Test Conditions	Min	Typ	Max	Unit
Statistic Characteristics							
Drain-Source Breakdown Voltage		BV _{DSS}	V _{GS} =0V, I _D =250uA	600			V
Zero Gate Voltage Drain Current		I _{DSS}	V _{DS} =600V, V _{GS} =0V			10	uA
Gate-Body Leakage Current	Forward	I _{GSSF}	V _{GS} =30V, V _{DS} =0V			100	nA
	Reverse	I _{GSSR}	V _{GS} =-30V, V _{DS} =0V			-100	nA
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} =V _{GS} , I _D =800uA	3.0	4.0	5.0	V
Static Drain-Source On-Resistance		R _{DS(ON)}	V _{GS} =10V, I _D =20A		78	90	mΩ
Gate Resistance		R _G	f=1MHz, Open Drain		0.7		Ω
Dynamic Characteristics							
Input Capacitance		C _{ISS}	V _{DS} =50V, V _{GS} =0V, f=1MHz		3300		pF
Output Capacitance		C _{OSS}			136		
Reverse Transfer Capacitance		C _{RSS}			2.3		
Effective output capacitance, energy related ^{NOTE5}		C _{O(er)}	V _{GS} =0V, V _{DS} =0...400V		98.2		pF
Effective output capacitance, time related ^{NOTE6}		C _{O(tr)}			601		
Turn-on Delay Time		t _{d(on)}	V _{DD} =400V, I _D =20A R _G =1.8Ω, V _{GS} =10V		24		ns
Rise Time		t _r			38		
Turn-off Delay Time		t _{d(off)}			48		
Fall Time		t _f			10		
Gate Charge Characteristics							
Gate to Source Charge		Q _{gs}	V _{DD} =480V, I _D =20A V _{GS} =0 to 10V		22.9		nC
Gate to Drain Charge		Q _{gd}			45.6		
Gate Charge Total		Q _g			90.3		
Gate Plateau Voltage		V _{plateau}			6.5		V
Reverse Diode Characteristics							
Drain-Source Diode Forward Voltage		V _{SD}	V _{GS} =0V, I _{SD} =20A		0.9	1.1	V
Reverse Recovery Time		t _{rr}	V _R =100V, I _F =20A dI _F /dt=100A/us		158		ns
Reverse Recovery Charge		Q _{rr}			0.95		uC
Peak Reverse Recovery Current		I _{rrm}			12		A

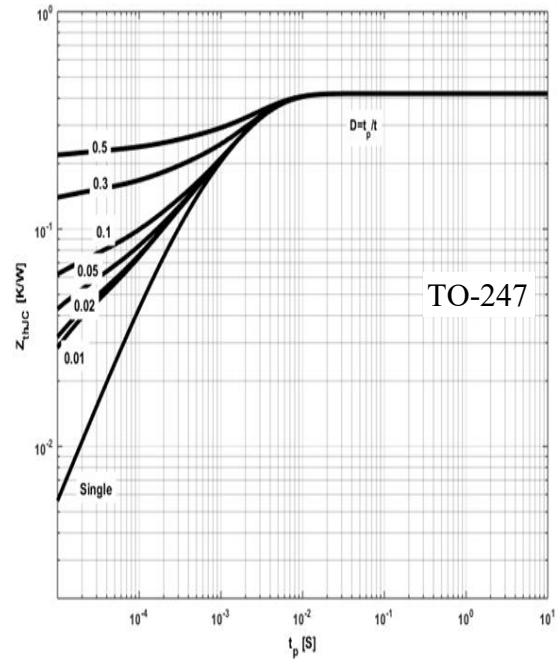
Note:

5. $C_{O(er)}$ is a fixed capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0 to 480V

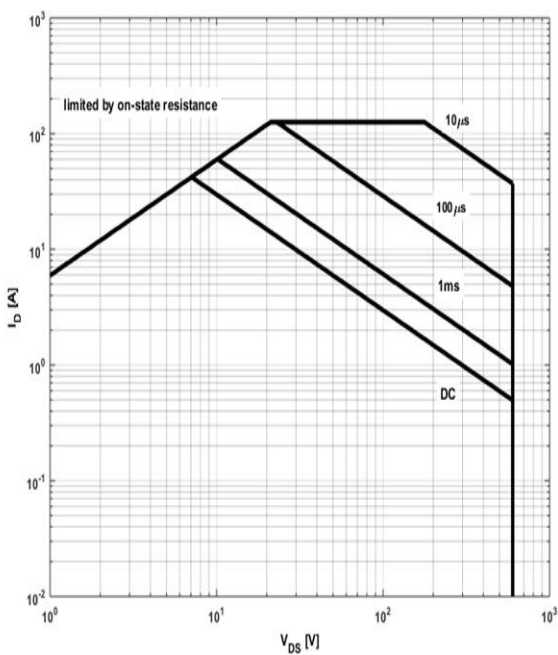
6. $C_{O(tr)}$ is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 480 V

Typical Performance Characteristics
Figure 3: Power Dissipation


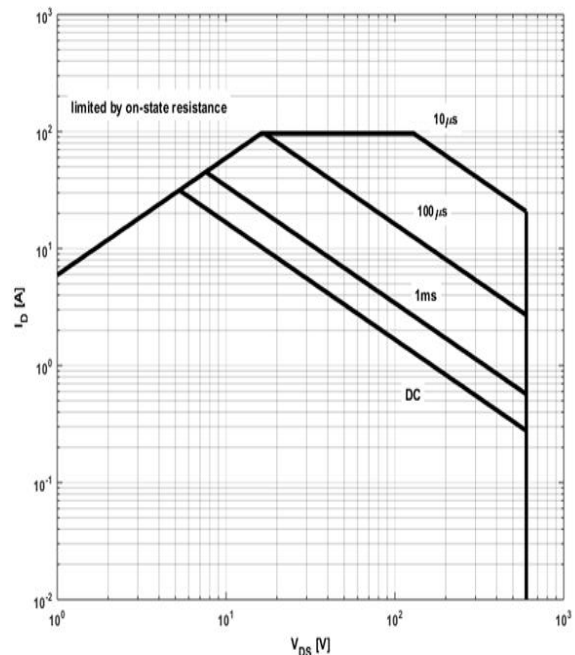
$$P_{\text{tot}} = f(T_c)$$

Figure 4: Max. Transient Thermal Impedance


$$Z_{\text{thJC}} = f(t_p); \text{ parameter: } D = t_p / T$$

Figure 5: Safe Operating Area


$$I_D = f(V_{DS}); T_c = 25^\circ\text{C}; V_{GS} > 7\text{V}; \text{ parameter } t_p$$

Figure 6: Safe Operating Area


$$I_D = f(V_{DS}); T_c = 80^\circ\text{C}; V_{GS} > 7\text{V}; \text{ parameter } t_p$$

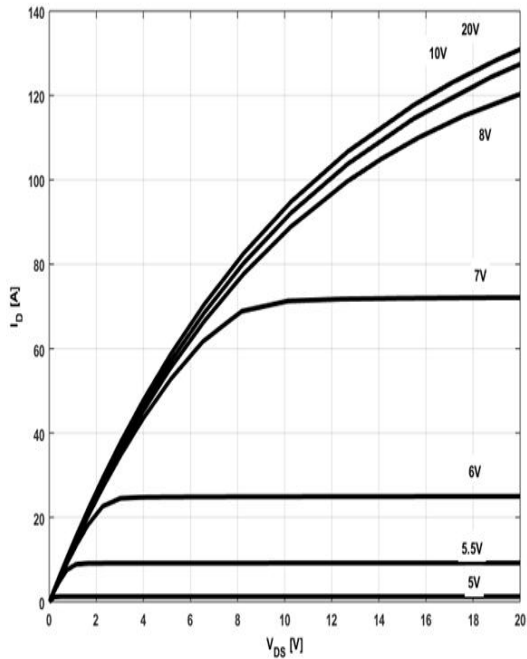
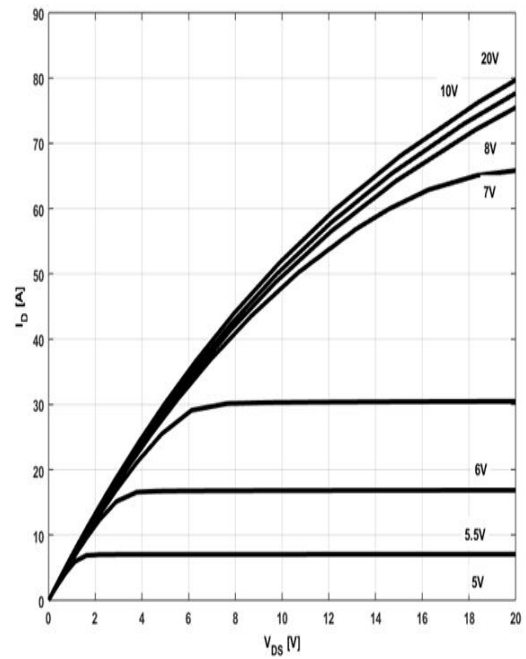
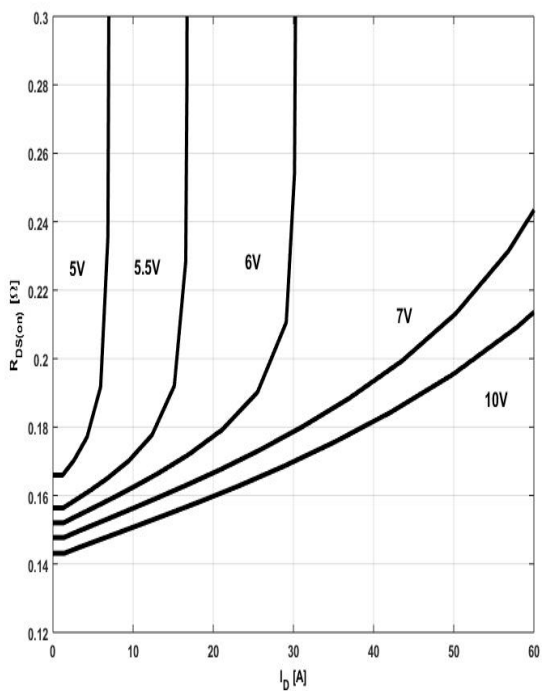
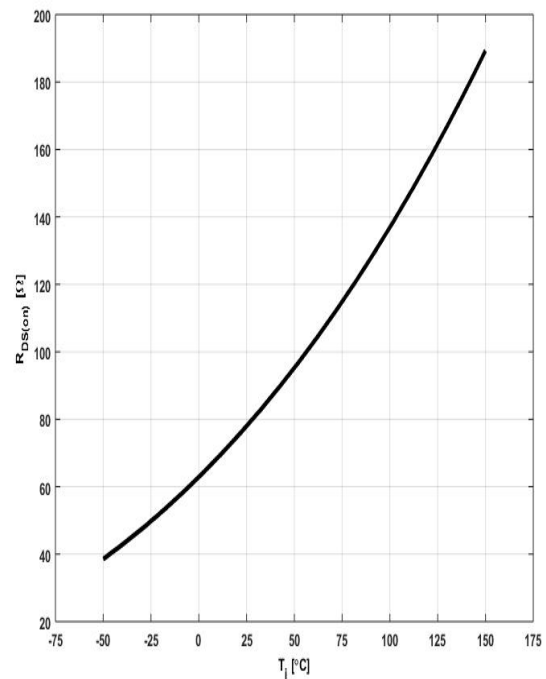
Figure 7: Typ. Output Characteristics

 $I_D = f(V_{DS}); T_j = 25^\circ\text{C}; \text{parameter: } V_{GS}$
Figure 8: Typ. Output Characteristics

 $I_D = f(V_{DS}); T_j = 125^\circ\text{C}; \text{parameter: } V_{GS}$
Figure 9: Typ. Drain-Source On-State Resistance

 $R_{DS(ON)} = f(I_D); T_j = 125^\circ\text{C}; \text{parameter: } V_{GS}$
Figure 10: Typ. Drain-Source On-State Resistance

 $R_{DS(ON)} = f(T_j); I_D = 20\text{A}; V_{GS} = 10\text{V}$

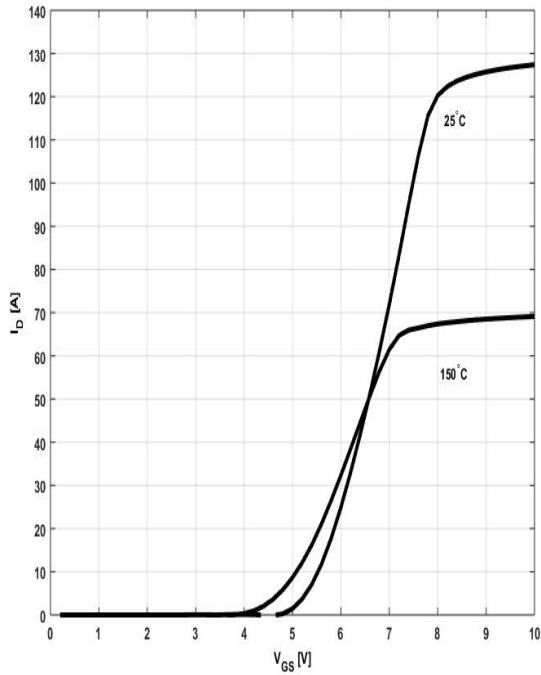
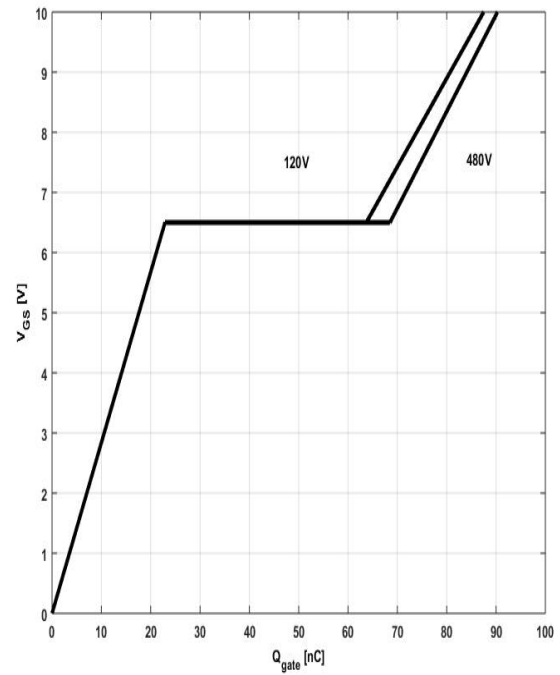
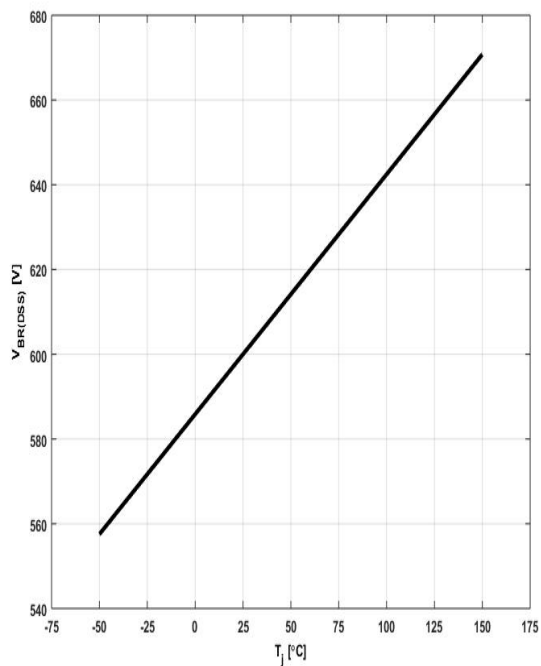
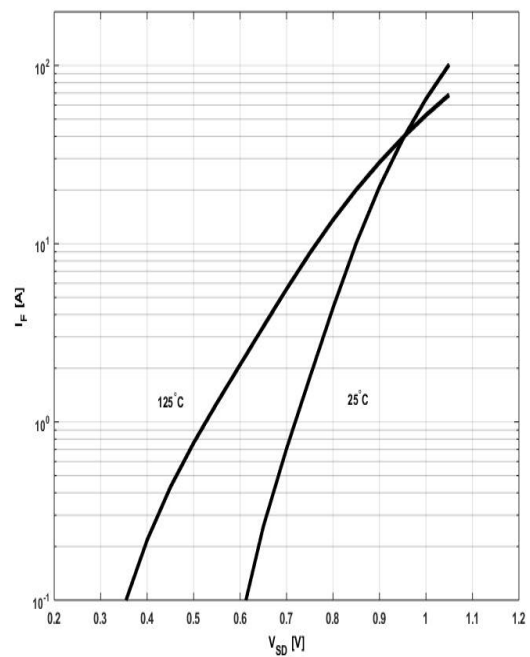
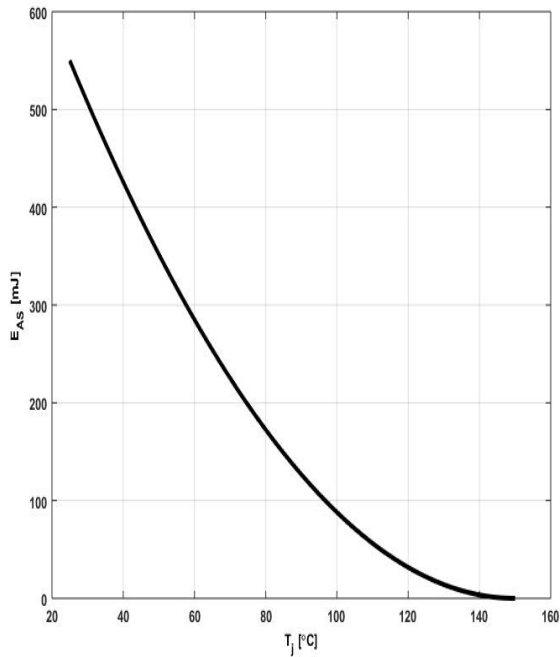
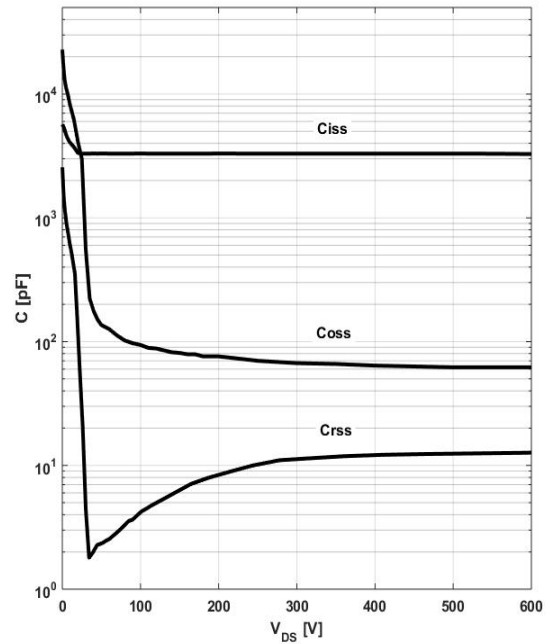
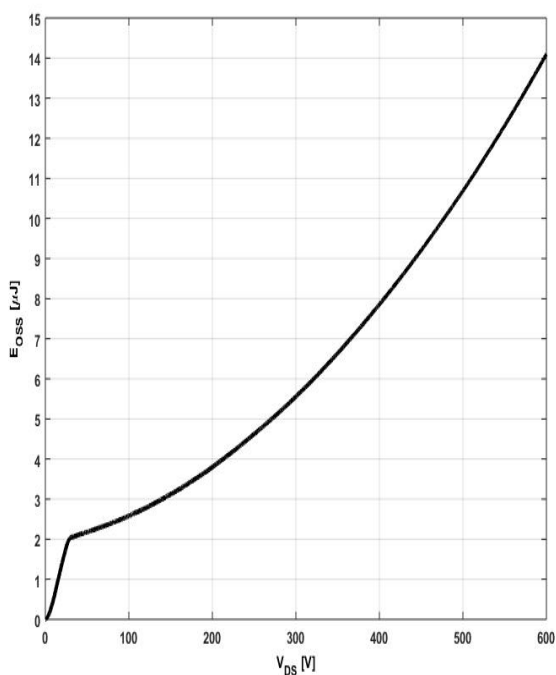
Figure 11: Typ. Transfer Characteristics

 $I_D = f(V_{GS}); V_{DS} = 20V$
Figure 12: Typ. Gate Charge

 $V_{GS} = f(Q_{gate}), I_D = 20A \text{ pulsed}$
Figure 13: Drain-Source Breakdown Voltage

 $V_{BR(DSS)} = f(T_j); I_D = 10mA$
Figure 14: Forward Characteristics of Reverse Diode

 $I_F = f(V_{SD}); \text{parameter: } T_j$

Figure 15: Avalanche Energy


$$E_{AS}=f(T_J); I_D=4.5A; V_{DD}=60V$$

Figure 16: Typ. Capacitances


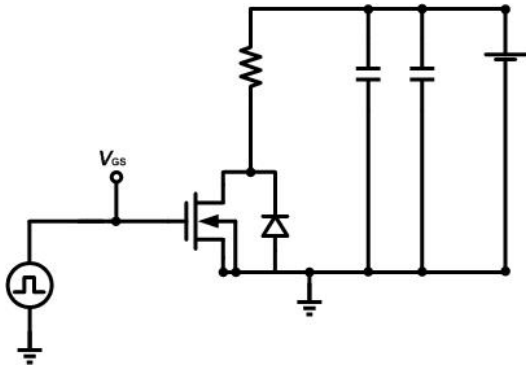
$$C=f(V_{DS}); V_{GS}=0; f=1MHz$$

Figure 17: Coss Stored Energy


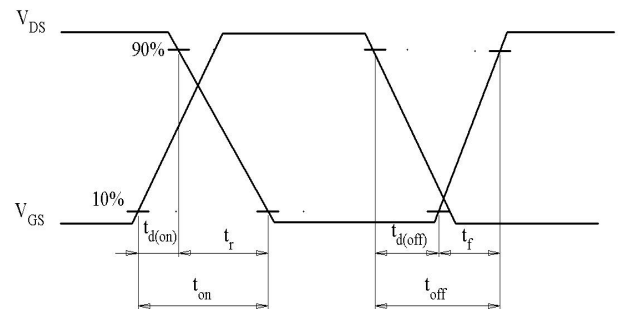
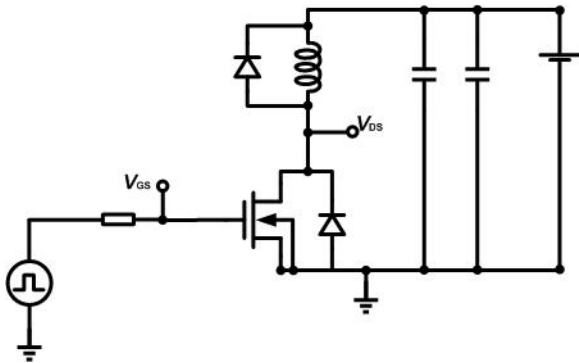
$$E_{oss}=f(V_{DS})$$

Test Circuits

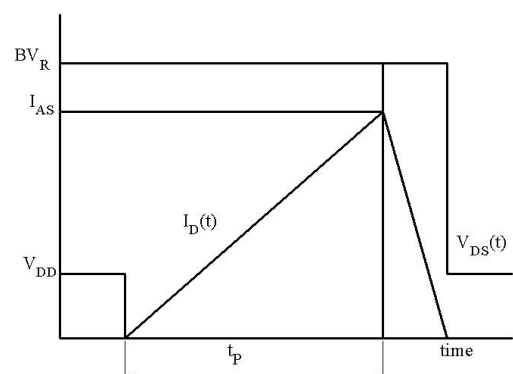
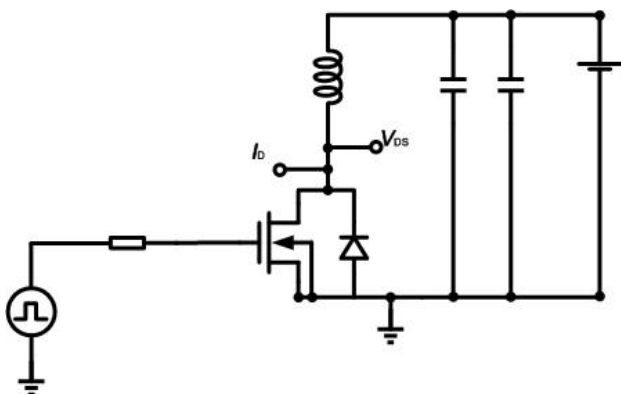
1. Gate Charge Test Circuit & Waveform



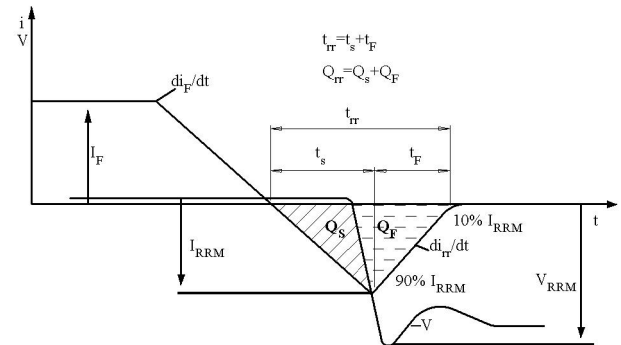
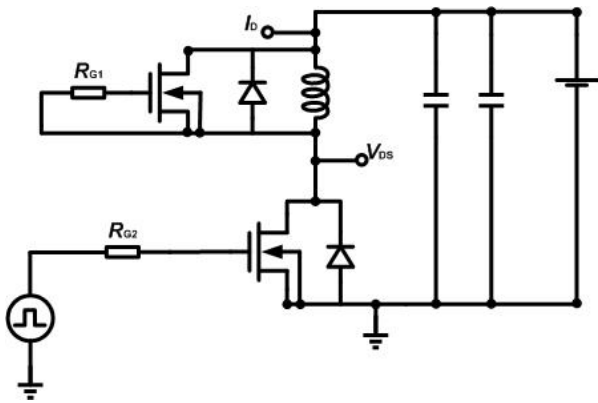
2. Switch Time Test Circuit

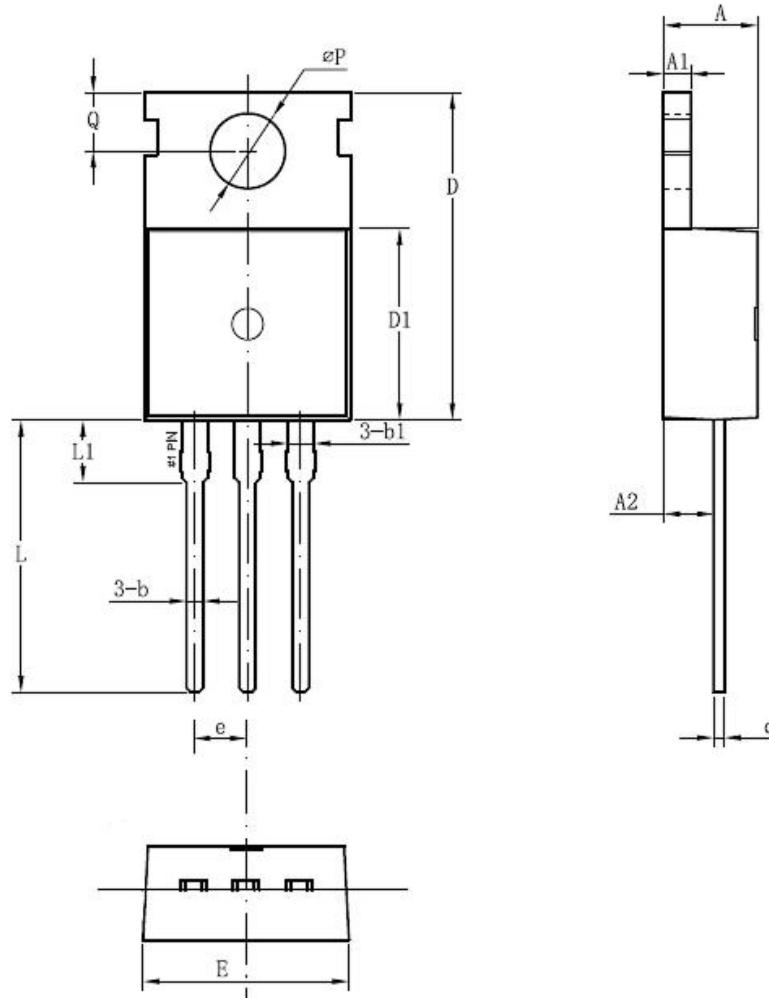


3. Unclaimed Inductive Switching Test Circuit & Waveforms

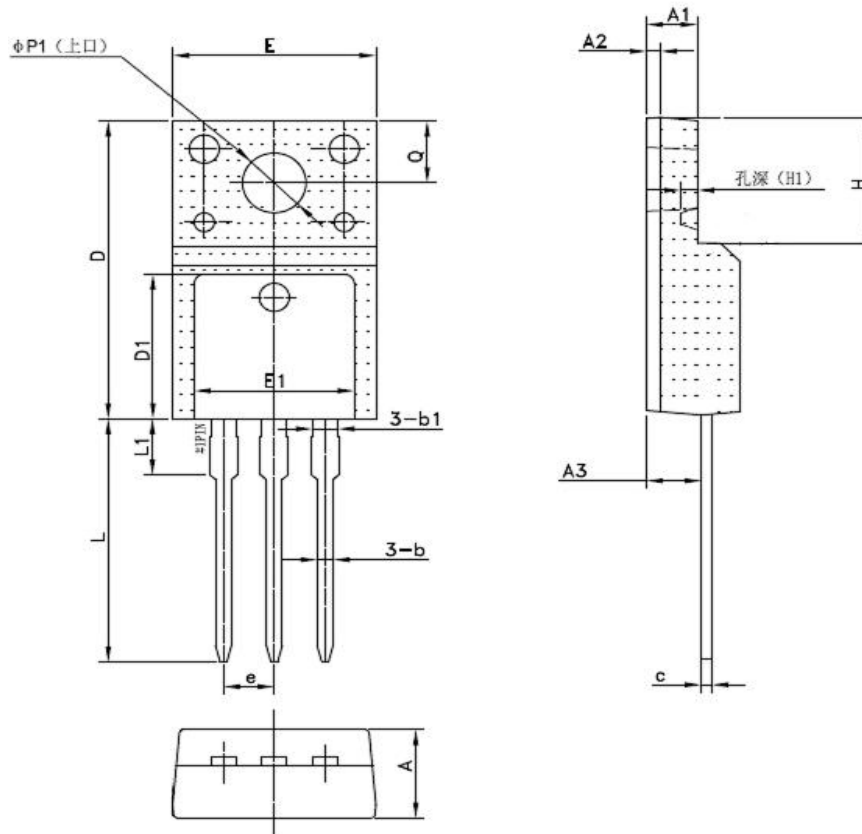


4. Test Circuit and Waveform for Diode Characteristics

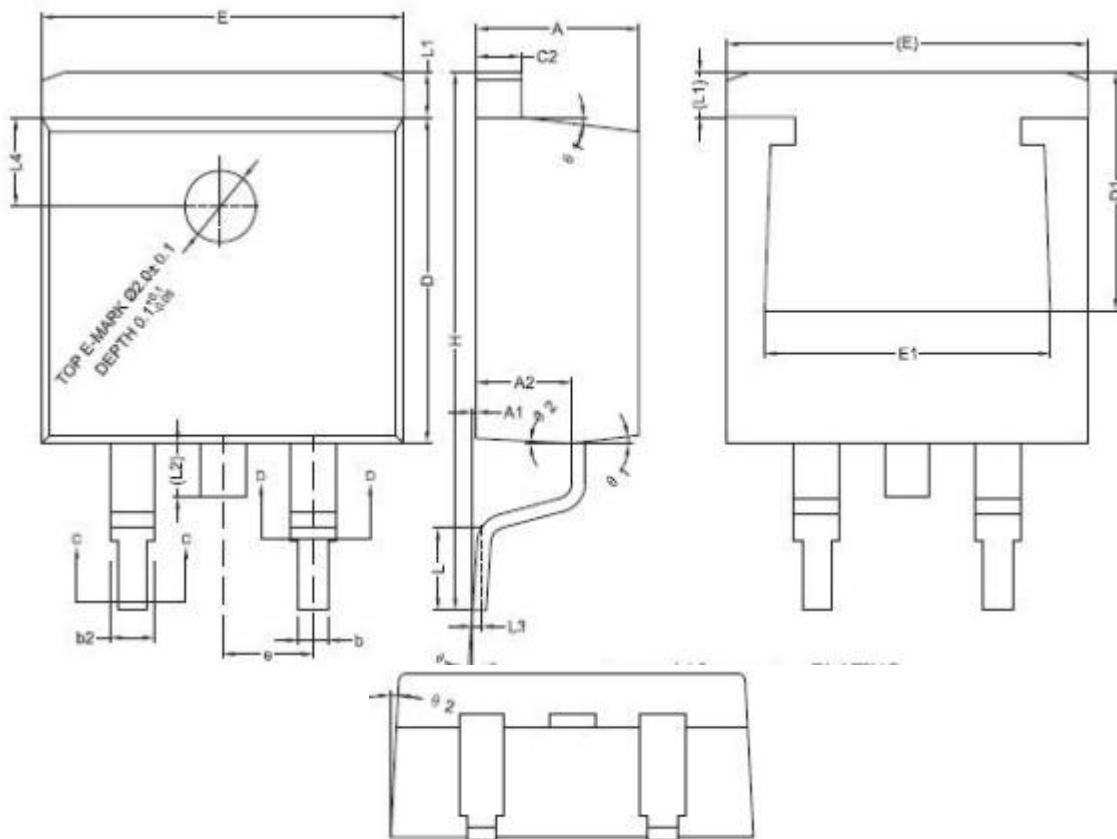


Mechanical Dimensions (Continued)
TO-220C
Unit: mm


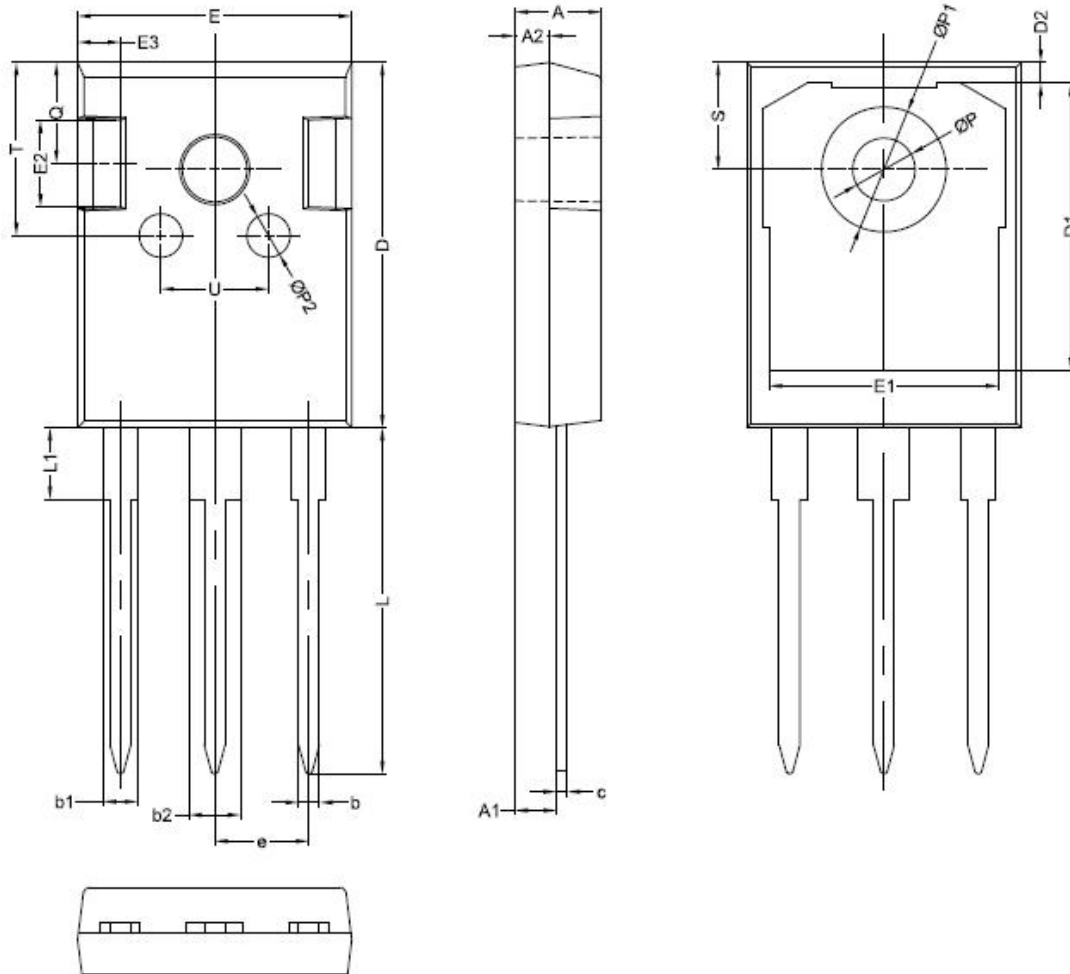
Symbol	Dimensions(mm)		
	Min.	Typ.	Max.
A	4.30	4.50	4.70
A1	1.20	1.30	1.40
A2	2.20	2.40	2.60
b	0.70	0.80	0.95
b1	-	1.27	-
c	0.40	0.50	0.65
D	15.20	15.70	16.20
D1	9.00	9.20	9.40
E	9.70	10.00	10.20
e	2.54(BSC)		
L	12.60	13.08	13.60
L1	-	3.00	-
ϕP	3.50	3.60	3.80
Q	2.60	2.80	3.00

Mechanical Dimensions
TO-220F
Unit: mm


Symbol	Dimensions(mm)		
	Min.	Typ.	Max.
A	4.30	4.70	4.90
A1	2.34	2.54	2.90
A2	-	0.70	-
A3	2.56	2.76	2.96
b	0.55	-	0.95
b1	-	1.28	-
c	0.42	0.50	0.70
D	14.70	-	16.07
D1	-	7.70	-
E	9.96	10.16	10.36
E1	-	8.00	-
e	2.54(BSC)		
H	-	6.70	-
(H1)	-	(0.81)	-
L	12.48	12.98	13.50
L1	-	2.93	-
ΦP1	-	3.18	-
Q	2.90	3.30	3.50

Mechanical Dimensions (Continued)
TO-263-2
Unit: mm


Symbol	Dimensions(mm)		
	Min.	Typ.	Max.
A	4.40	4.57	4.70
A1	0.00	0.10	0.25
A2	2.59	2.69	2.79
b	0.77	-	0.90
b1	0.76	0.81	0.86
c	0.34	-	0.47
c1	0.33	0.38	0.43
D	9.05	9.15	9.25
D1	6.60	-	-
E	10.06	10.16	10.26
E1	7.80	-	8.20
e	2.54(BSC)		
H	14.70	15.10	15.50
L	2.00	2.30	2.60
L1	1.17	1.27	1.40
L2	-	-	1.75
L3	0.25BSC		
L4	2.00REF		
θ	0°	-	8°

Mechanical Dimensions (Continued)
TO-247
Unit: mm


Symbol	Dimensions(mm)			Symbol	Dimensions(mm)		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	4.80	5.00	5.20	E2	-	5.00	-
A1	2.21	2.41	2.61	E3	-	2.50	-
A2	1.90	2.00	2.10	e	5.44(BSC)		
b	1.10	1.20	1.35	L	19.42	19.92	20.42
b1	-	2.00	-	L1	-	4.13	-
b2	-	3.00	-	P	3.50	3.60	3.70
c	0.55	0.60	0.75	P1	-	-	7.40
D	20.80	21.00	21.20	P2	-	2.50	-
D1	-	16.55	-	Q	-	5.80	-
D2	-	1.20	-	S	6.05	6.15	6.25
E	15.60	15.80	16.00	T	-	10.00	-
E1	-	13.30	-	U	-	6.20	-



Shenzhen Sanrise Technology Co., LTD.

<http://www.sanrise-tech.com>

IMPORTANT NOTICE

Sanrise Technology Limited Company reserves the right to make changes without further notice to any products or specifications herein. Sanrise Technology Limited Company does not assume any responsibility for use of any its products for any particular purpose, nor does Sanrise Technology Limited Company assume any liability arising out of the application or use of any its products or circuits. Sanrise Technology Limited Company does not convey any license under its patent rights or other rights nor the rights of others.

Main Site:

- Headquarter

Shenzhen Sanrise Technology Co., LTD.

A1206, Skyworth building, No. 008, gaoxinnan 1st Road,
Gaoxin District, Yuehai street,, Nanshan District, ShenZhen,
P.R.China

Tel: +86-755-22953335

Fax: +86-755-22916878

- Shanghai Office

Shenzhen Sanrise Technology Co., LTD.

Rm.401, Building B, No. 666, Zhangheng Road,
Zhangjiang Hi-Tech Park, Shanghai, P.R.China

Tel: +86-21-68825918