
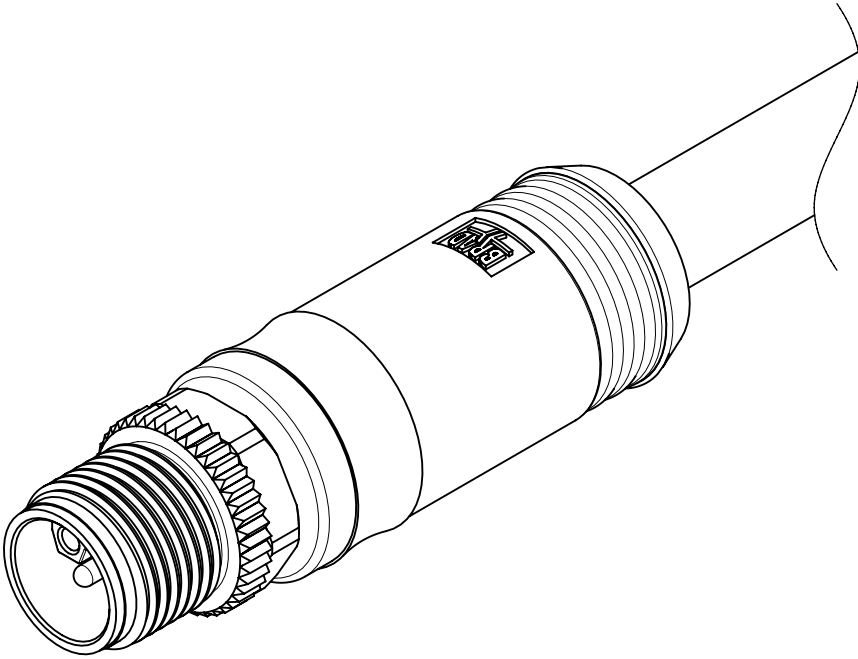
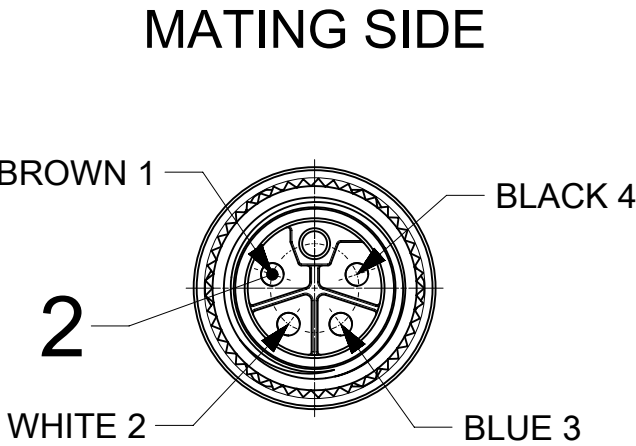


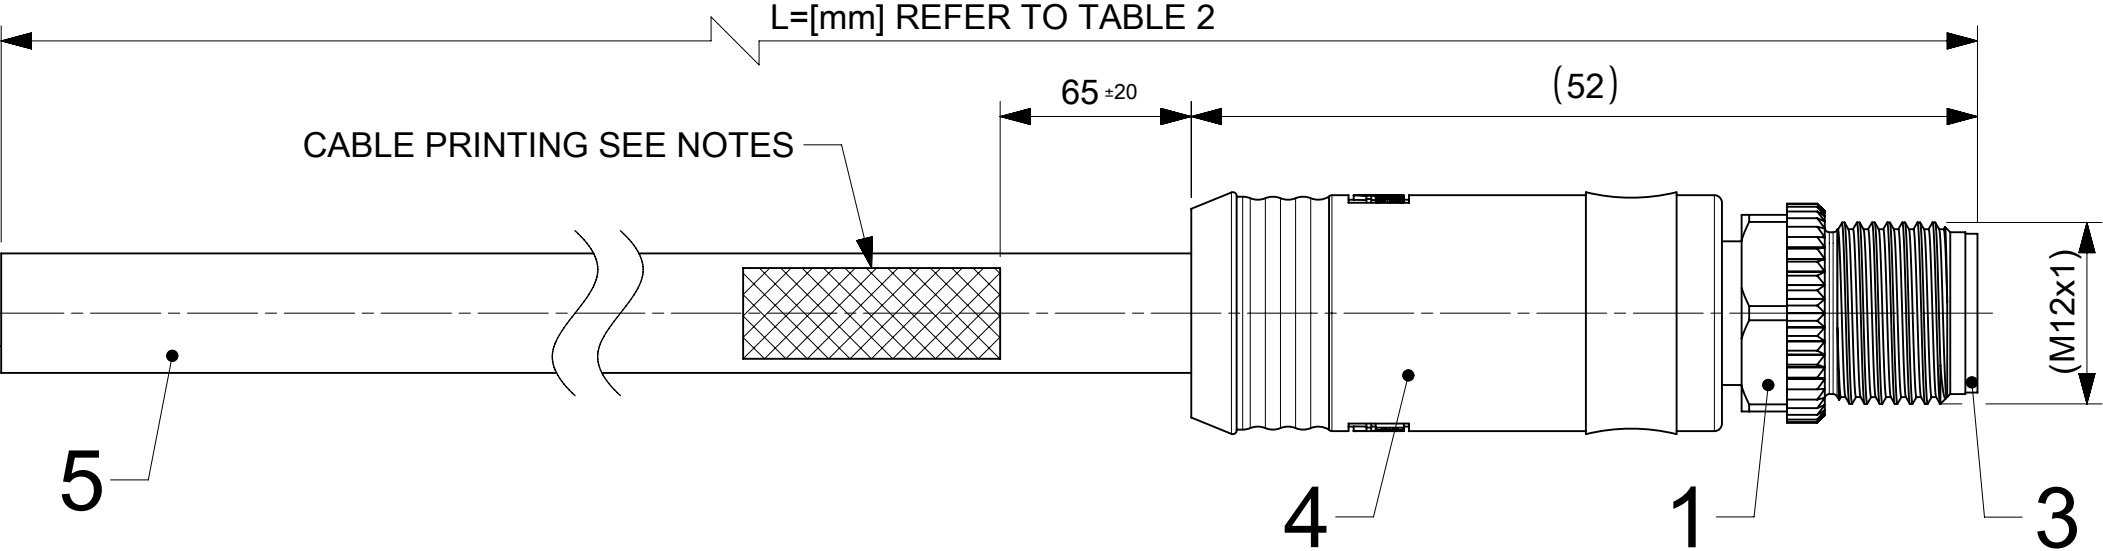

NOTES:

RATED VOLTAGE: MAX. 63V AC/DC
RATED CURRENT: MAX. 12A at 40°C (derating has to be considered)
IP RATING: IP67 (mated and locked condition)
TEMPERATURE RANGE: -25°C TO +85°C

CABLE PRINTING (sequence as shown below):

- MOLEX part number
- "Made in " COUNTRY OF ORIGIN
- MOLEX AND DATE OF MANUFACTURING (YY=YEAR; WW=WEEK): MXYWW
- Not for current interrupting

PART ACCORDING PRODUCT SPEC: 1205010169
PACKAGING ACCORDING PACKAGING SPEC: 1201202000

TABLE 1

POS	DESCRIPTION	MATERIAL	FINISH
1	NUT M12 MA	BRASS	Ni
2	CONTACT 15 MA	BRASS	Au
3	INSERT	PA	BLACK
4	OVERMOLD	TPE	BLACK
5	CABLE 4x1.5 D7.9 WSOR	PUR	BLACK
OPTIONAL 6	ID CARRIER	-	-

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED ATTRIBUTE TO GENERAL MARKET IN ECTR								
	mm		2:1										
	DIVISIONAL SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)				CSE M12 4P LC MA STR WSOR BK XM UNSH 1.5							
ANGULAR TOL ± 1.0 °													
4 PLACES ±													
3 PLACES ±				EC NO: 735577									
2 PLACES ± 0.05				DRWN: NIKHIS3 2023/01/12									
1 PLACE ± 0.3				CHK'D: RSILLER 2023/01/19									
0 PLACES ± 0.5				APPR: RSILLER 2023/01/19									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				PRODUCT CUSTOMER DRAWING									
				DOCUMENT NUMBER				DOC TYPE		DOC PART		REVISION	
				1205000342				PSD		000		A1	
				MATERIAL NUMBER		CUSTOMER				SHEET NUMBER			
				SEE TABLE 2		GENERAL MARKET				1 OF 2			
				THIRD ANGLE PROJECTION		DRAWING		SERIES					
						A3-SIZE		120500					

ENGINEERING NO - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

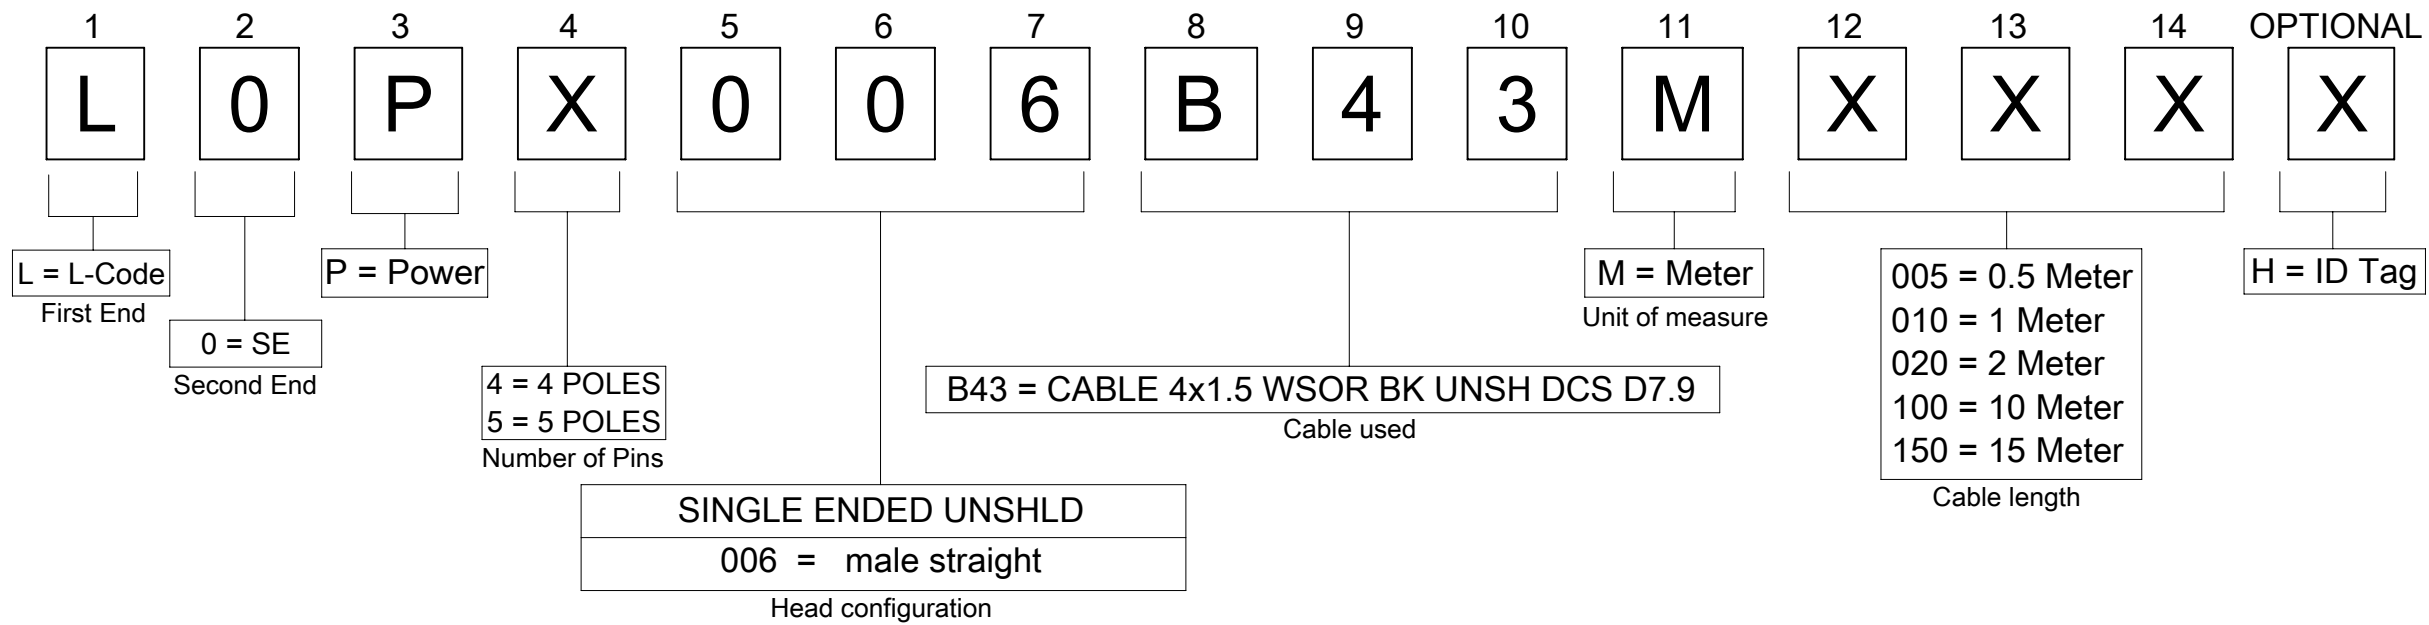



TABLE 2

NOMINAL SECTION 1,5mm²			
MATERIAL NO.	ENGINEERING NO.	L [mm]	TOLERANCE [mm]
1205000342	L0P4006B43M010	1000	+40
1205000343	L0P4006B43M020	2000	+60
1205000344	L0P4006B43M030	3000	+60
1205000345	L0P4006B43M050	5000	+60
1205000346	L0P4006B43M100	10000	+80
1205000347	L0P4006B43M150	15000	+140
1205000348	L0P4006B43M200	20000	+140

DOCUMENT STATUS	P1	RELEASE DATE	2023/01/19	11:13:37
-----------------	----	--------------	------------	----------

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{E} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED ATTRIBUTE TO GENERAL MARKET IN ECTR					molex CSE M12 4P LC MA STR WSOR BK XM UNSH 1.5					
	mm		1:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
	ANGULAR TOL ± 1.0°				EC NO: 735577 DRWN: NIKHIS3 2023/01/12 CHK'D: RSILLER 2023/01/19 APPR: RSILLER 2023/01/19					PRODUCT CUSTOMER DRAWING					
	4 PLACES		±												
	3 PLACES		±												
	2 PLACES		± 0.05		INITIAL REVISION: DRWN: FDAFERNER 2020/08/19 APPR: RSILLER 2022/12/05					DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
	1 PLACE		± 0.3							1205000342		PSD	000	A1	
	0 PLACES		± 0.5												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		120500		SEE TABLE 2		GENERAL MARKET		2 OF 2	