


SOD-123



Features

- I Pb-Free Packages are Available
- I Wide Zener Reverse Voltage Range
- I Small Package Size for High Density Applications
- I ESD Rating of Class 3 (>16 kV) per Human Body Model


Maximum Ratings (T_a =25°C unless otherwise specified)

Characteristic	Symbol	Value	Unit
Forward voltage(note2) @I _F =10mA	V _F	0.9	V
Power Dissipation(note1)	P _D	500	mW
Thermal Resistance, Junction to Ambient Air	R _{θJA}	250	°C/W
Operation Junction and Storage Temperature Range	T _J , T _{stg}	-55 ~ +150	°C

Notes:1. Mounted on 1 in2 FR-4 board with 2oz. Copper, in a still air environment with T_a=25 °C .
 2. Tested with pulses, T_p≤1.0ms.

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise noted)

symbol	Parameter
V _Z	Reverse zener voltage @ I _{ZT}
I _{ZT}	Reverse current
I _R	Reverse leakage current@ V _R
V _R	Reverse voltage
I _F	Forward current
V _F	Forward voltage @ I _F

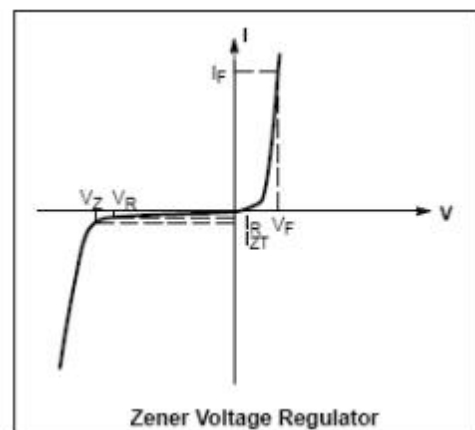



ELECTRICAL CHARACTERISTICS

 T_a=25°C unless otherwise specified

Part Number	Marking	Zener Voltage (Notes 1)				Leakage Current		
		V _Z (Volts)			@I _{ZT}	I _R @V _R		
		Min	Nom	Max	µA	µA	Volts	
MMSZ4678	CC	1.71	1.8	1.89	50	7.5	1	
MMSZ4679	CD	1.90	2.0	2.10	50	5	1	
MMSZ4680	CE	2.09	2.2	2.31	50	4	1	
MMSZ4681	CF	2.28	2.4	2.52	50	2	1	
MMSZ4682	CH	2.565	2.7	2.835	50	1	1	
MMSZ4683	CJ	2.85	3.0	3.15	50	0.8	1	
MMSZ4684	CK	3.13	3.3	3.47	50	7.5	1.5	
MMSZ4685	CM	3.42	3.6	3.78	50	7.5	2	
MMSZ4686	CN	3.70	3.9	4.10	50	5	2	
MMSZ4687	CP	4.09	4.3	4.52	50	4	2	
MMSZ4688	CT	4.47	4.7	4.94	50	10	3	
MMSZ4689	CU	4.85	5.1	5.36	50	10	3	
MMSZ4690	CV	5.32	5.6	5.88	50	10	4	
MMSZ4691	CA	5.89	6.2	6.51	50	10	5	
MMSZ4692	CX	6.46	6.8	7.14	50	10	5.1	
MMSZ4693	CY	7.13	7.5	7.88	50	10	5.7	
MMSZ4694	CZ	7.79	8.2	8.61	50	1	6.2	
MMSZ4695	DC	8.27	8.7	9.14	50	1	6.6	
MMSZ4698	DD	8.65	9.1	9.56	50	1	6.9	
MMSZ4697	DE	9.50	10	10.50	50	1	7.6	
MMSZ4698	DF	10.45	11	11.55	50	0.05	8.4	
MMSZ4699	DH	11.40	12	12.60	50	0.05	9.1	
MMSZ4700	DJ	12.35	13	13.65	50	0.05	9.8	
MMSZ4701	DK	13.30	14	14.70	50	0.05	10.6	
MMSZ4702	DM	14.25	15	15.75	50	0.05	11.4	
MMSZ4703	DN	15.20	16	16.80	50	0.05	12.1	
MMSZ4704	DP	16.15	17	17.85	50	0.05	12.9	
MMSZ4705	DT	17.10	18	18.90	50	0.05	13.6	
MMSZ4706	DU	18.05	19	19.95	50	0.05	14.4	
MMSZ4707	DV	19.00	20	21.00	50	0.01	15.2	
MMSZ4708	DA	20.90	22	23.10	50	0.01	16.7	
MMSZ4709	DX	22.80	24	25.20	50	0.01	18.2	
MMSZ4710	DY	23.75	25	26.25	50	0.01	19.0	
MMSZ4711	EA	25.65	27	28.35	50	0.01	20.4	
MMSZ4712	EC	26.60	28	29.40	50	0.01	21.2	
MMSZ4713	ED	28.50	30	31.50	50	0.01	22.8	
MMSZ4714	EE	31.35	33	34.65	50	0.01	25.0	
MMSZ4715	EF	34.20	36	37.80	50	0.01	27.3	
MMSZ4716	EH	37.05	39	40.95	50	0.01	29.6	
MMSZ4717	EJ	40.85	43	45.15	50	0.01	32.6	


 1.Nominal Zener voltage is measured with the device junction in thermal equilibrium at T_L=30°C±1°C

SOD-123 Package Outline Dimensions

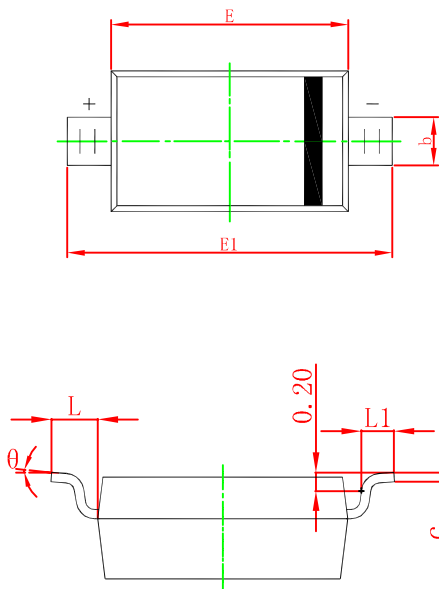

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.450	0.650	0.018	0.026
c	0.080	0.150	0.003	0.006
D	1.500	1.700	0.059	0.067
E	2.600	2.800	0.102	0.110
E1	3.550	3.850	0.140	0.152
L	0.500 REF		0.020 REF	
L1	0.250	0.450	0.010	0.018
θ	0°	8°	0°	8°

SOD-123 Suggested Pad Layout

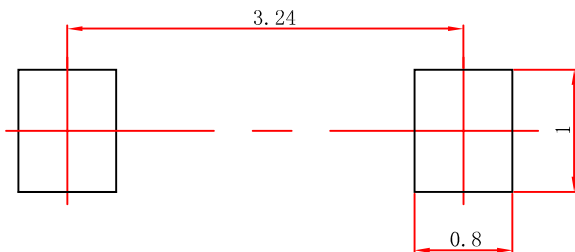

Note:
 1. Controlling dimension: in millimeters.
 2. General tolerance: ± 0.05mm.
 3. The pad layout is for reference purposes only.