




Indicator lights, 22 mm, round, Metal, shiny, green, lens, smooth, with holder, LED module with integrated LED 230 V AC, screw terminal, with laser labeling, symbol number according to, ISO 7000 or IEC 60417

product brand name	SIRIUS ACT
product designation	Indicator lights
design of the product	Complete unit
product type designation	3SU1
product line	Metal, shiny, 22 mm
manufacturer's article number	
• of supplied LED module	<a href="#">3SU1401-1BF40-1AA0</a>
• of the supplied holder	<a href="#">3SU1550-0AA10-0AA0</a>
• of supplied repeater	<a href="#">3SU1051-6AA40-0AA0</a>
<b>Enclosure</b>	
number of command points	1
<b>Actuator</b>	
product extension optional light source	Yes
color	
• of the actuating element	green
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	29.45 mm
marking of the actuating element	Any inscription, symbol compliant with ISO7000 and IEC60417
<b>Front ring</b>	
product component front ring	No
<b>Holder</b>	
material of the holder	Metal
<b>Display</b>	
number of LED modules	1
<b>General technical data</b>	
product component light source	Yes
insulation voltage rated value	320 V
degree of pollution	3
surge voltage resistance rated value	4 kV
protection class IP	IP66, IP67, IP69(IP69K)
• of the terminal	IP20
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
• acc. to IEC 60068-2-27	Sinusoidal half-wave 50g / 11 ms
vibration resistance	
• acc. to IEC 60068-2-6	10 ... 500 Hz: 5g

reference code acc. to IEC 81346-2	P
<b>Supply voltage</b>	
type of voltage of the supply voltage of the light source	AC
<ul style="list-style-type: none"> <li>supply voltage 1 of the light source at AC at 50 Hz rated value</li> <li>supply voltage 1 of the light source at AC at 60 Hz rated value</li> </ul>	230 V
relative negative tolerance of the supply voltage	20 %
relative positive tolerance of the supply voltage	20 %
<b>Control circuit/ Control</b>	
inrush current maximum	3 A
<b>Connections/ Terminals</b>	
type of electrical connection of modules and accessories	Screw-type terminal
<b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>solid with core end processing</li> <li>solid without core end processing</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> <li>at AWG cables</li> </ul>	2x (0.5 ... 0.75 mm <sup>2</sup> ) 2x (1.0 ... 1.5 mm <sup>2</sup> ) 2x (0.5 ... 1.5 mm <sup>2</sup> ) 2x (1.0 ... 1.5 mm <sup>2</sup> ) 2x (18 ... 14)
<b>tightening torque of the screws in the bracket</b> <ul style="list-style-type: none"> <li>tightening torque with screw-type terminals</li> </ul>	1 ... 1.2 N·m 0.8 ... 0.9 N·m
<b>Lamp</b>	
type of light source	LED
color of the light source	green
light intensity	900 ... 1 800 mcd
<b>Ambient conditions</b>	
<ul style="list-style-type: none"> <li>ambient temperature during operation</li> <li>ambient temperature during storage</li> </ul>	-25 ... +70 °C -40 ... +80 °C
environmental category during operation acc. to IEC 60721	3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95 %, no condensation in operation permitted for all devices behind front panel)
<b>Installation/ mounting/ dimensions</b>	
<b>fastening method</b> <ul style="list-style-type: none"> <li>of modules and accessories</li> </ul>	front panel mounting Front plate mounting
height	40 mm
width	30 mm
shape of the installation opening	round
mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm
mounting height	11.8 mm
installation width	29.5 mm
installation depth	49.7 mm
<b>Certificates/ approvals</b>	
<b>Further information</b>	
<b>Information- and Downloadcenter (Catalogs, Brochures,...)</b> <a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a>	
<b>Industry Mall (Online ordering system)</b> <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1156-6AA40-1AA0-Z Y13">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1156-6AA40-1AA0-Z Y13</a>	
<b>Cax online generator</b> <a href="http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3SU1156-6AA40-1AA0-Z Y13">http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3SU1156-6AA40-1AA0-Z Y13</a>	
<b>Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)</b> <a href="https://support.industry.siemens.com/cs/ww/en/ps/3SU1156-6AA40-1AA0-Z Y13">https://support.industry.siemens.com/cs/ww/en/ps/3SU1156-6AA40-1AA0-Z Y13</a>	
<b>Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)</b> <a href="http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1156-6AA40-1AA0-Z Y13&amp;lang=en">http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1156-6AA40-1AA0-Z Y13&amp;lang=en</a>	

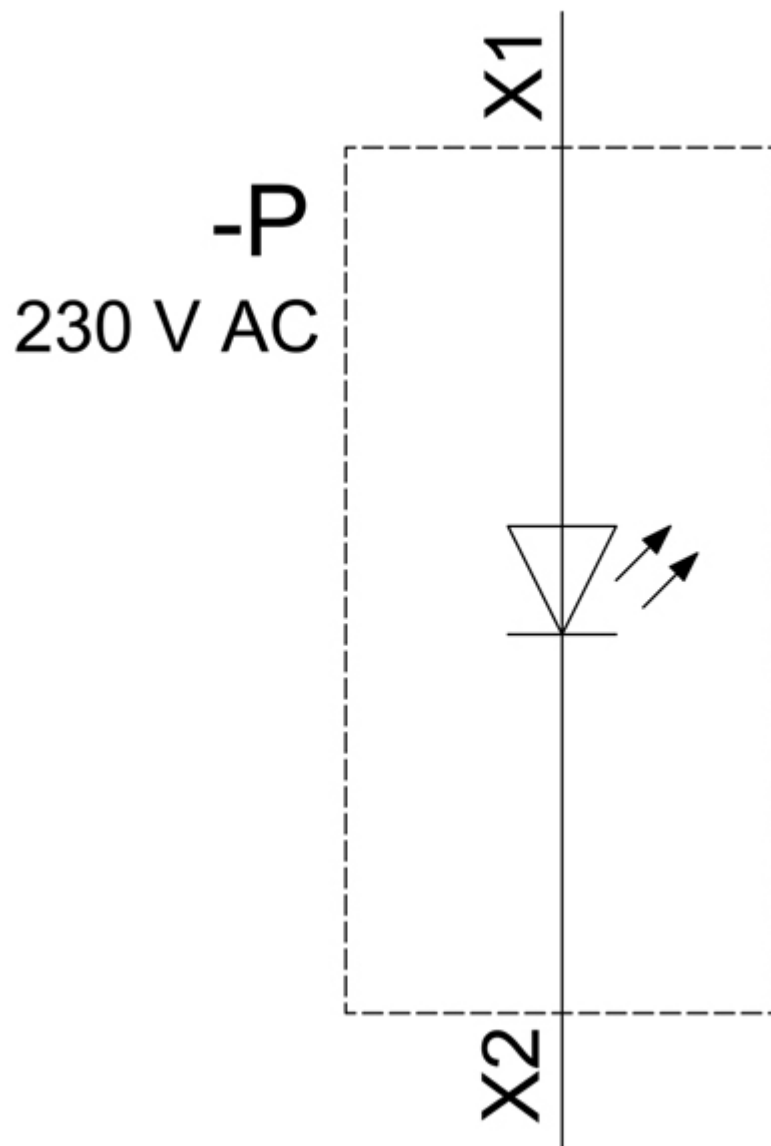

last modified:

8/31/2020 