

### Features

- Low operating voltage: 5V
- Ultra low capacitance: 0.08pF(typ)
- Ultra low leakage: nA level
- Low clamping voltage
- -IEC 61000-4-2 (ESD) immunity test
  - Air discharge:  $\pm 12\text{kV}$
  - Contact discharge:  $\pm 8\text{kV}$
- -IEC61000-4-4 (EFT) 40A (5/50ns)
- -IEC61000-4-5 (Lightning) 2.5A (8/20 $\mu\text{s}$ )
- 2-pin leadless package
- These are Pb-Free Devices
- Response Time is Typically < 1 ns


### Mechanical Characteristics

- Package: DFN1006-2(0402)
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound
- Terminal Connections: See Diagram Below
- -IEC 61000-4-2 (ESD) immunity test

### Applications

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- USB 2.0 power and data line

### Dimensions and Pin Configuration

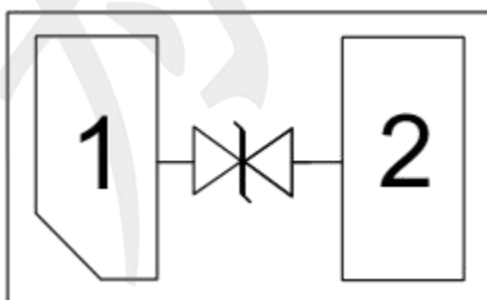


### Absolute Maximum Ratings (T<sub>amb</sub>=25°C unless otherwise specified)

| Parameter                                                      | Symbol           | Value       | Unit |
|----------------------------------------------------------------|------------------|-------------|------|
| Peak Pulse Power (8/20μs)                                      | P <sub>pk</sub>  | 36          | W    |
| Peak Pulse Current (8/20μs)                                    | I <sub>pp</sub>  | 2.5         | A    |
| ESD per IEC 61000-4-2 (Air)<br>ESD per IEC 61000-4-2 (Contact) | VESD             | ±12<br>±8   | KV   |
| Operating Temperature Range                                    | T <sub>J</sub>   | -55 to +125 | °C   |
| Storage Temperature Range                                      | T <sub>stg</sub> | -55 to +150 | °C   |

### Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise specified)


| Parameter               | Symbol           | Min | Typ  | Max  | Unit | Test Condition                       |
|-------------------------|------------------|-----|------|------|------|--------------------------------------|
| Reverse Working Voltage | V <sub>RWM</sub> | --  | --   | 5    | V    |                                      |
| Breakdown Voltage       | V <sub>BR</sub>  | 6.5 | 7.5  | --   | V    | I <sub>T</sub> = 1mA                 |
| Reverse Leakage Current | I <sub>R</sub>   | --  | --   | 0.1  | uA   | V <sub>RWM</sub> = 5V                |
| Clamping Voltage        | V <sub>C</sub>   | --  | 14   | --   | V    | I <sub>pp</sub> = 1A (8x 20us pulse) |
| Clamping Voltage        | V <sub>C</sub>   | --  | 18   | --   | V    | I <sub>pp</sub> = 2A (8x 20us pulse) |
| Junction Capacitance    | C <sub>J</sub>   | --  | 0.08 | 0.12 | pF   | V <sub>R</sub> = 0V, f = 1MHz        |

| Symbol           | Parameter                                  |
|------------------|--------------------------------------------|
| V <sub>RWM</sub> | Nominal Reverse Working Voltage            |
| I <sub>R</sub>   | Reverse Leakage Current @ V <sub>RWM</sub> |
| V <sub>BR</sub>  | Reverse Breakdown Voltage @ I <sub>T</sub> |
| I <sub>T</sub>   | Test Current for Reverse Breakdown         |
| V <sub>C</sub>   | Clamping Voltage @ I <sub>pp</sub>         |
| I <sub>pp</sub>  | Maximum Peak Pulse Current                 |
| C <sub>ESD</sub> | Parasitic Capacitance                      |
| V <sub>R</sub>   | Reverse Voltage                            |
| f                | Small Signal Frequency                     |

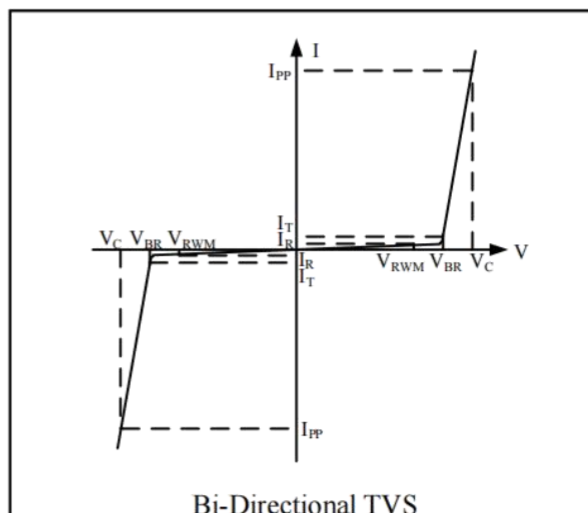


## Characteristic Curves


**Fig1. 8/20 $\mu$ s Pulse Waveform**

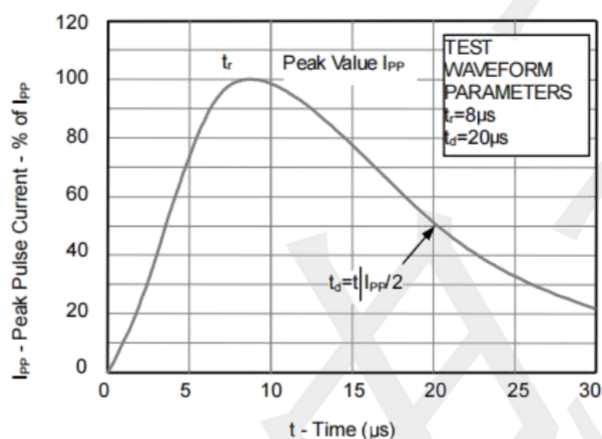

**Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)**

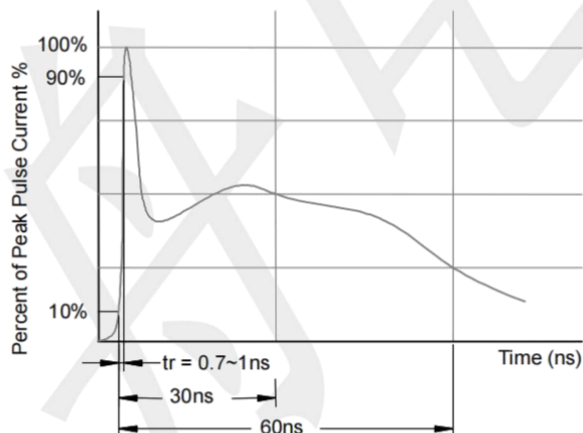


**Fig3. Power Derating Curve**

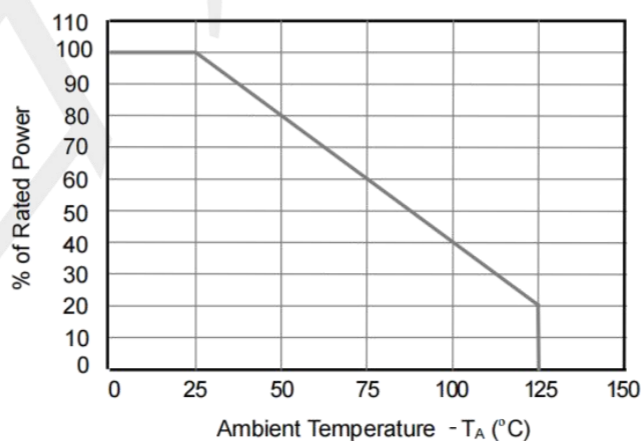


### Package Outline & Dimensions

#### DFN1006-2 (0402)

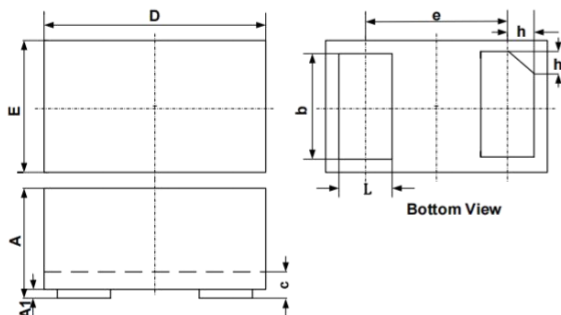

| SYM | DIMENSIONS  |      |      |           |       |       |
|-----|-------------|------|------|-----------|-------|-------|
|     | MILLIMETERS |      |      | INCHES    |       |       |
|     | MIN         | NOM  | MAX  | MIN       | NOM   | MAX   |
| A   | 0.45        | 0.50 | 0.55 | 0.018     | 0.020 | 0.022 |
| A1  | 0.00        | 0.02 | 0.05 | 0.000     | 0.001 | 0.002 |
| b   | 0.45        | 0.50 | 0.55 | 0.018     | 0.020 | 0.022 |
| c   | 0.12        | 0.15 | 0.18 | 0.005     | 0.006 | 0.007 |
| D   | 0.95        | 1.00 | 1.05 | 0.037     | 0.039 | 0.041 |
| e   | 0.65 BSC    |      |      | 0.026 BSC |       |       |
| E   | 0.55        | 0.60 | 0.65 | 0.022     | 0.024 | 0.026 |
| L   | 0.20        | 0.25 | 0.30 | 0.008     | 0.010 | 0.012 |
| h   | 0.07        | 0.12 | 0.17 | 0.003     | 0.005 | 0.007 |

### Suggested Land Pattern

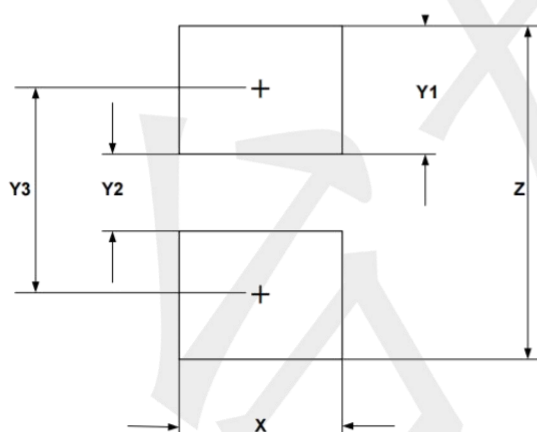

| SYM | DIMENSIONS  |        |
|-----|-------------|--------|
|     | MILLIMETERS | INCHES |
| X   | 0.60        | 0.024  |
| Y1  | 0.50        | 0.020  |
| Y2  | 0.30        | 0.012  |
| Y3  | 0.80        | 0.032  |
| Z   | 1.30        | 0.052  |