




+ WIRE AND CABLE
HOOK UP WIRE

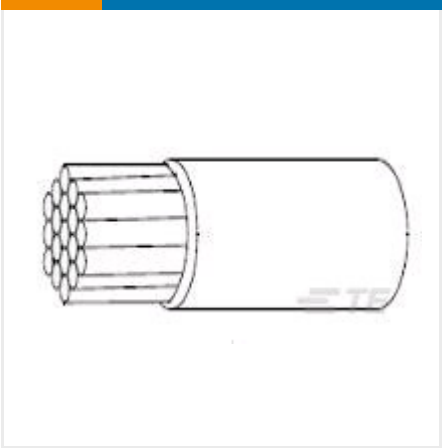

✓ Active

TE CONNECTIVITY (TE)
22759/33-28-5
Raychem

22759/33-28-5
TE Internal Number: 537137-000
Mil-Spec: M22759/33-28-5
Alias ID: 9-1194215-1

EU RoHS Compliant
EU ELV Compliant

Cable Type Spec 55A
Voltage Rating (V) 600
Insulation Material Radiation-Crosslinked, Modified ETFE
Conductor Material Silver-Coated High Strength Copper Alloy
Wire Size (AWG) 28

↓ **PRODUCT DRAWING**
English

DOCUMENTATION

Product Drawings

WIRE, RADIATION-CROSSLINKED, MODIFIED, ETFE-INSULATED, SILVER-COATED HIGH STRENGTH COPPER ALLOY, LIGHTWEIGHT

PDF (TIFF AVAILABLE)
English

Product Specifications

Product Specification

Wire And Cable, Electric, Radiation-Crosslinked, Extruded, Modified, Fluoropolymer-Insulated Copper Or Copper Alloy

PDF
English

FEATURES

+

Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Cable Type Spec 55A
Product Classification Cable - High Performance - Spec 44, 55 & RCW
Product Type Wire
Cable Style Primary

Configuration Features

Number of Strands 7
Number of Conductors 1

Electrical Characteristics

Voltage Rating (V) 600

Body Features

Insulation Material Radiation-Crosslinked, Modified ETFE
Conductor Material Silver-Coated High Strength Copper Alloy
Wire Color Green

Dimensions

Strand Size (AWG) 36
Wire Size (AWG) 28
Wire Size (mm²) .081
Insulation Thickness (in) .005
Conductor Diameter .38 mm [.015 in]
Wire Diameter .69 mm [.027 in]
Overall Outside Diameter .69 mm [.027 in]

Usage Conditions

Operating Temperature Range (°C) -65 – 200

PRODUCT COMPLIANCE

+

Statement of Compliance

Statement of Compliance
PDF