

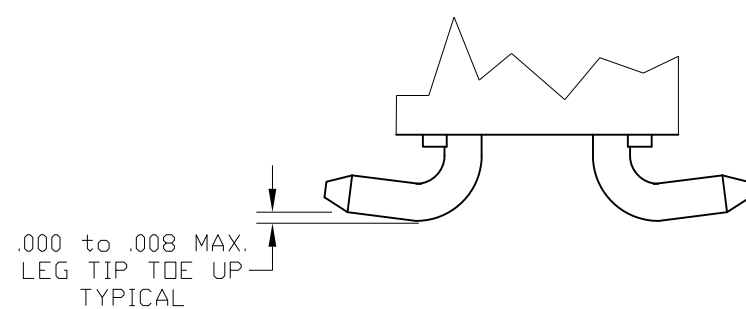
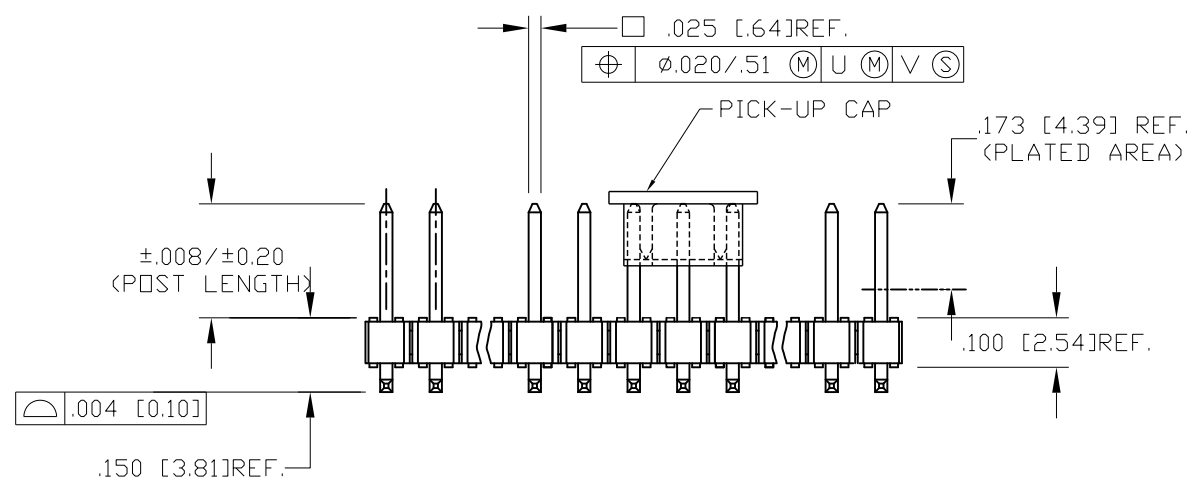


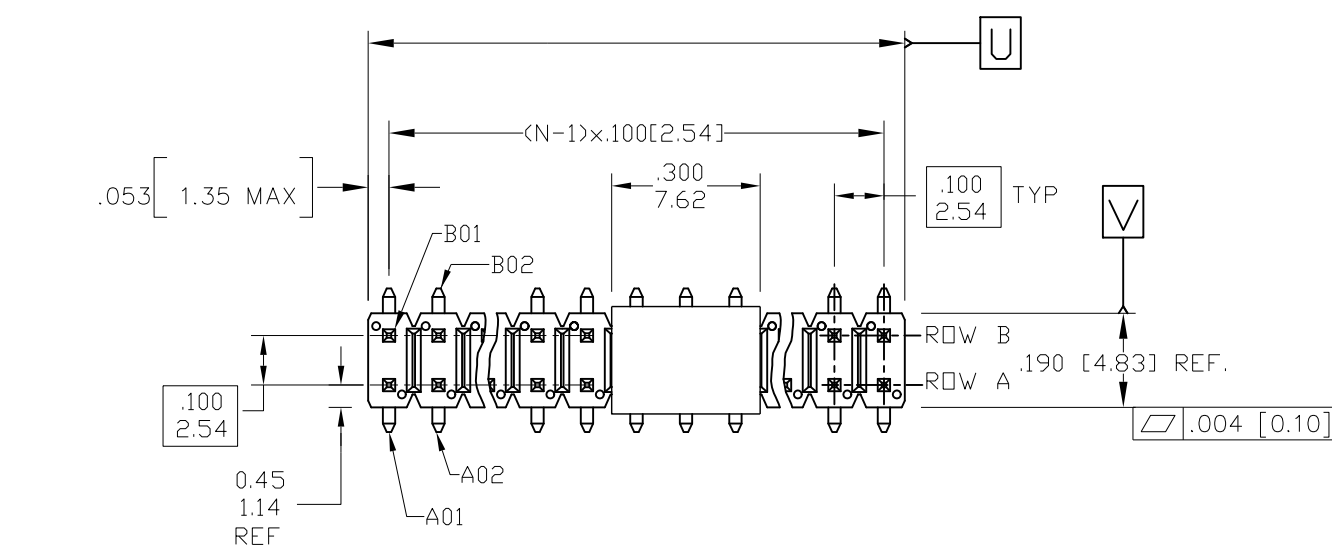

PRODUCT NUMBER
SEE TABLE

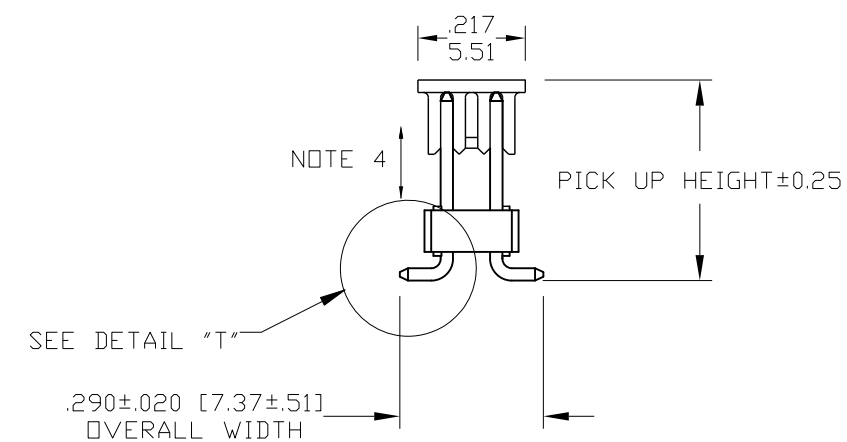

VIEW N.T.S.
DETAIL "T"

[illegible]



© 2016 AFCI



A

B

C

D

PRODUCT NUMBER
10125394 - X X X X X LF

PLATING
T=100μ" [2.5μm] TIN
ON CONTACT AREA
AND ON TAIL (SEE NOTE 10)

LEAD FREE OPTION NOTE 8

PACKAGING TYPE, NOTE 5


POSITIONS PER ROW
02 TO 20

LEAD STYLE	POST LENGTH	PICK UP HEIGHT
08	0.230/5.84	10.29
30	0.318/8.08	12.53

NOTES:

- HOUSING MAT'L: HIGH TEMPERATURE THERMOPLASTIC.
FLAME RETARDANT PER UL 94V-0
COLOR: BLACK

THESE PART NUMBERS WILL WITHSTAND EXPOSURE
TO 260° C PEAK TEMPERATURE FOR 20 SECONDS IN
WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.
- PIN MATERIAL: COPPER ALLOY
- TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS ROW.
EXAMPLE: 10 POS., N x .100/2.54=1.00/25.4
- 2LBS/0.9KG MIN. PIN RETENTION IN EITHER DIRECTION.
- PACKAGING: NONE =POLY BAGS WITHOUT PICKUP CAP.
A =TAPE AND REEL WITH PICKUP CAPS.
- UNDERPLATING: 50μ"/1.2μm Ni.
- PIN TIPS ON Sn PLATED PRODUCT MAY HAVE BARE METAL ON TWO SIDES,
BOTH ENDS.
- PART NUMBERS WITH "LF" SUFFIX AT THE END ARE LEAD FREE.
- THESE PRODUCTS MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- THIS PRODUCT HAS 100% PURE TIN PLATING IN THE INTERFACE AND
HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT
ENVIRONMENTS."

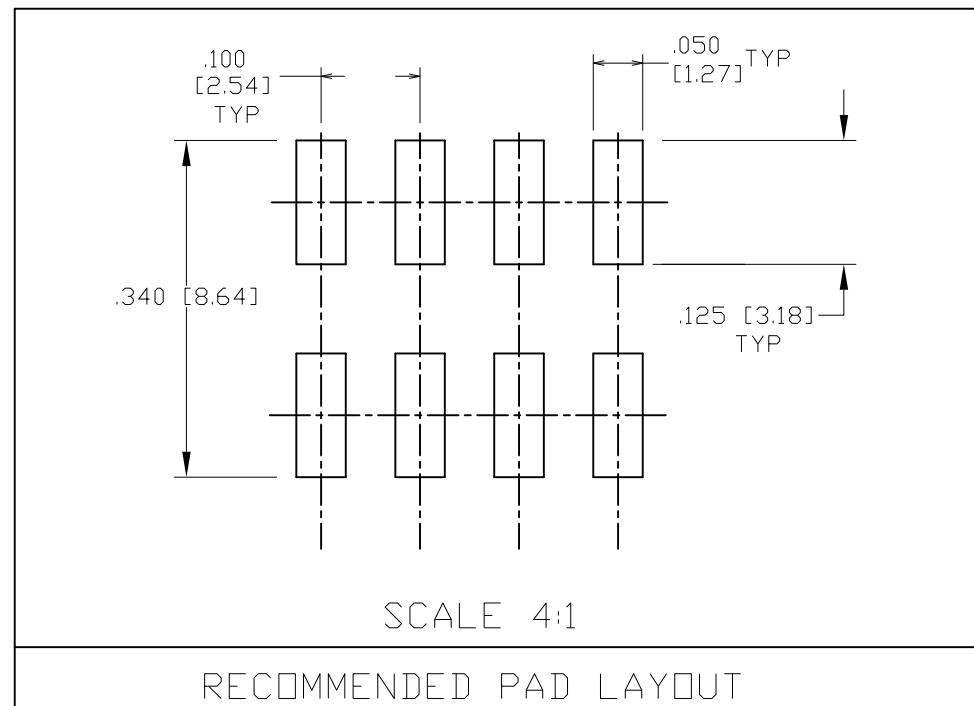

A

B

C

D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[10125394-T0808ALF](#) [10125394-T0803ALF](#)