
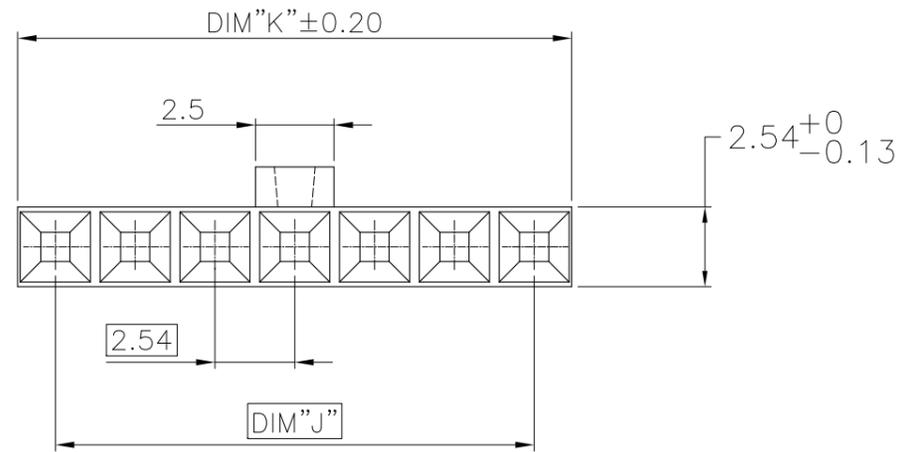


PRODUCT NUMBER	NO. OF POS	DIM K	DIM L	DIM C	DIM W DIM Z
78211-003LF	3	7.47	5.08	1.35	0.05
78211-004LF	4	10.01	7.62	1.35	0.05
78211-005LF	5	12.55	10.16	1.35	0.05
78211-006LF	6	15.09	12.70	1.35	0.10
78211-007LF	7	17.63	15.24	1.35	0.10
78211-008LF	8	20.17	17.78	1.35	0.10
78211-009LF	9	22.71	20.32	1.35	0.10
78211-010LF	10	25.25	22.86	1.35	0.10
78211-011LF	11	27.79	25.40	1.35	0.15
78211-012LF	12	30.33	27.94	1.35	0.15
78211-013LF	13	32.87	30.48	1.35	0.15
78211-014LF	14	35.81	33.02	1.35	0.15
78211-015LF	15	37.95	35.56	1.35	0.15
78211-103LF	3	7.47	5.08	2.54	0.05
78211-105LF	5	12.55	10.16	2.54	0.05
78211-106LF	6	15.09	12.70	2.54	0.10

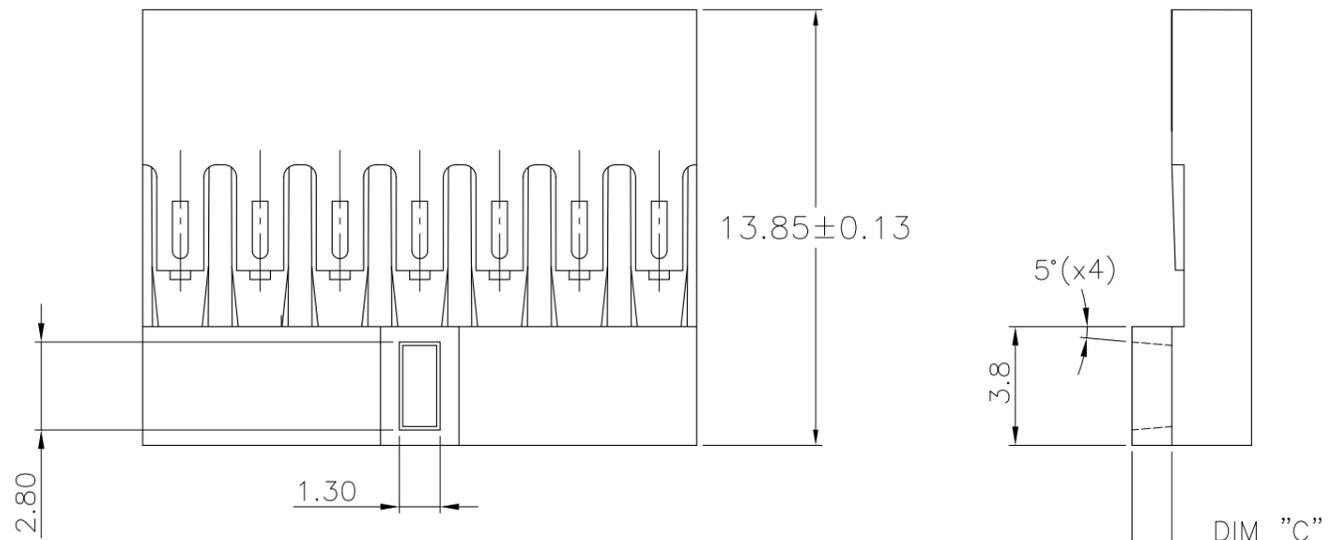

NOTES:

- MOLDING MATERIAL : MODIFIED POLYPHELYNENE  
COLOR BLACK, UL 94 V0
- LATCH MUST WITHSTAND 18N MIN PULL OUT FORCE
- STANDARD PACKAGING IN POLYBAGS
- TERMINALS MUST BE CRIMPED PROPERLY FOR SATISFACTORY LATCHING :
  - FOR CRIMPING INSTRUCTIONS, SEE TA-75 AND TA-295
  - FOR TERMINAL APPLICATION SEE TA-531.

PRODUCT SPECIFICATION: BUS-12-067.

- THIS HOUSING IS INTENDED FOR USE WITH MINI PV TERMINAL WITH 22-36 GAUGE WIRE
- RoHS COMPLIANT PRODUCT SPECIFICATIONS :
  - MEETS PACKAGING SPECS AS PER GS-14-920
  - PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
  - THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

mat'l. code 10036738		surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family BERGCON
ltr	ecn no	dr	date	title MINI LATCH HOUSING SR POLARIZED	
K	V07-0533	HTB	07.08.21	scale 5:1	
L	B-14321	LMU	13.03.21	FCI	
sheet index		revision sheet	dr L.MULIN 13.03.21		dwg no 78211
			engr L.MULIN 13.03.21		sheet 1 of 1
			chr J.COMPAGNON 13.03.21		size A3
			appd LMU 13.03.21		type CUSTOMER Drawing

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[78211-006LF](#)