

Description

The SX18N20HD is silicon N-channel Enhanced VDMOSFETs, is obtained by the self-aligned planar Technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. The transistor can be used in various power switching circuit for system miniaturization and higher efficiency.

General Features


$V_{DS} = 200V$ $I_D = 18A$

$R_{DS(ON)} < 150m\Omega$ @ $V_{GS}=10V$


Application

Uninterruptible Power Supply(UPS)

Power Factor Correction (PFC)



TO-252-3L



Absolute Maximum Ratings ($T_c=25^\circ C$ unless otherwise noted)

Symbol	Parameter	Value	Unit
		TO-252	
V_{DSS}	Drain-Source Voltage ($V_{GS} = 0V$)	200	V
I_D	Continuous Drain Current	18	A
I_{DM}	Pulsed Drain Current (note1)	72	A
V_{GS}	Gate-Source Voltage	± 20	V
E_{AS}	Single Pulse Avalanche Energy (note2)	340	mJ
I_{AR}	Avalanche Current (note1)	15	A
E_{AR}	Repetitive Avalanche Energy (note1)	8.3	mJ
P_D	Power Dissipation ($T_c = 25^\circ C$)	104	W
T_J, T_{stg}	Operating Junction and Storage Temperature Range	$-55 \sim +150$	$^\circ C$
R_{thJC}	Thermal Resistance, Junction-to-Case	1.2	$^\circ C/W$
R_{thJA}	Thermal Resistance, Junction-to-Ambient	62.5	$^\circ C/W$

Electrical Characteristics (T_J=25°C, unless otherwise noted)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V(BR)DSS	Drain-Source Breakdown Voltage	V _{GS} = 0V, I _D = 250μA	200	220	--	V
IDSS	Zero Gate Voltage Drain Current	V _{DS} = 200V, V _{GS} = 0V, T _J = 25°C	--	--	5	μA
		V _{DS} = 160V, V _{GS} = 0V, T _J = 125°C	--	--	100	
IGSS	Gate-Source Leakage	V _{GS} = ±20V	--	--	±100	nA
VGS(th)	Gate-Source Threshold Voltage	V _{DS} = V _{GS} , I _D = 250μA	2.0	3.5	4.0	V
RDS(on)	Drain-Source On-Resistance (Note3)	V _{GS} = 10V, I _D = 9A	--	120	150	mΩ
Ciss	Input Capacitance	V _{GS} = 0V, V _{DS} = 25V, f = 1.0MHz	--	1318	--	pF
Coss	Output Capacitance		--	180	--	
Crss	Reverse Transfer Capacitance		--	75	--	
Qg	Total Gate Charge	V _{DD} = 160V, I _D = 18A, V _{GS} = 10V	--	41	--	nC
Qgs	Gate-Source Charge		--	5.5	--	
Qgd	Gate-Drain Charge		--	19.5	--	
td(on)	Turn-on Delay Time	V _{DD} = 100V, I _D = 18A, R _G = 25 Ω	--	24	--	ns
tr	Turn-on Rise Time		--	45	--	
td(off)	Turn-off Delay Time		--	101	--	
tf	Turn-off Fall Time		--	95	--	
Is	Continuous Body Diode Current	T _C = 25 °C	--	--	18	A
ISM	Pulsed Diode Forward Current		--	--	72	
VSD	Body Diode Voltage	T _J = 25°C, I _{SD} = 18A, V _{GS} = 0V	--	--	1.4	V
trr	Reverse Recovery Time	V _{GS} = 0V, I _S = 18A, diF/dt = 100A /μs	--	230	--	ns
Qrr	Reverse Recovery Charge		--	1.8	--	μC

Note :

- 1、 The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2、 The EAS data shows Max. rating . IAS = 15A, VDD = 50V, RG = 25 Ω, Starting TJ = 25 °C
- 3、 The test condition is Pulse Test: Pulse width ≤ 300μs, Duty Cycle ≤ 1%
- 4、 The power dissipation is limited by 150°C junction temperature
- 5、 The data is theoretically the same as ID and IDM , in real applications , should be limited by total power dissipation.

Typical Characteristics

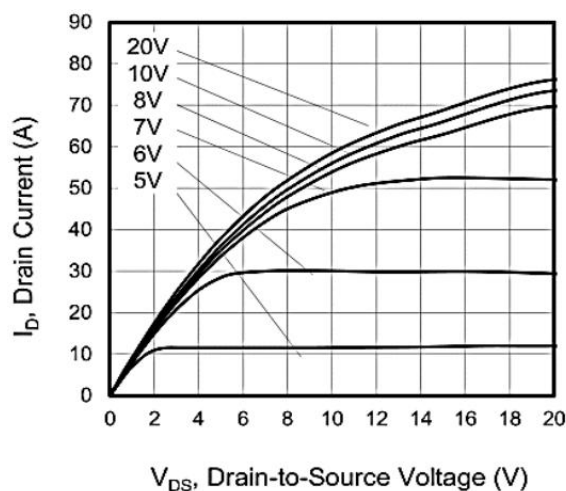


Figure 1. Output Characteristics ($T_J = 25^\circ\text{C}$)

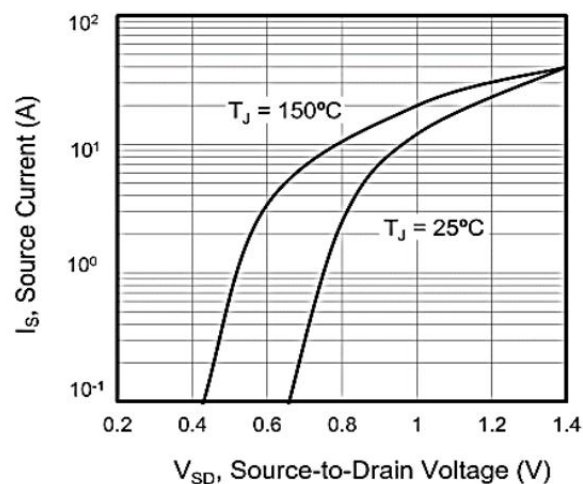


Figure 2. Body Diode Forward Voltage

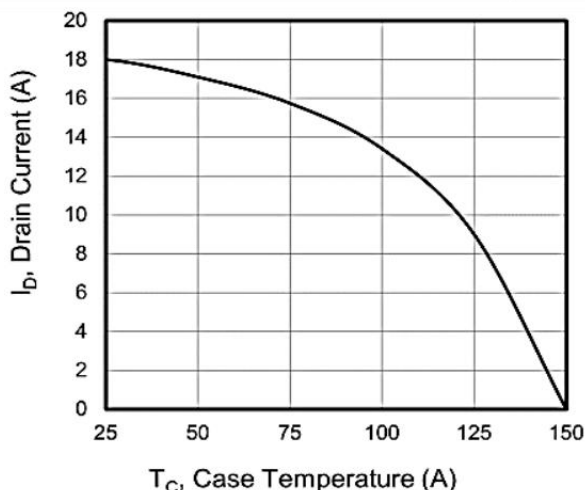


Figure 3. Drain Current vs. Temperature

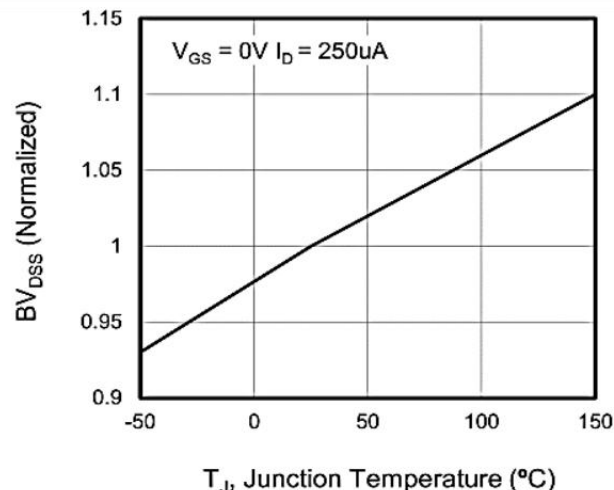


Figure 4. BV_{DSS} Variation vs. Temperature

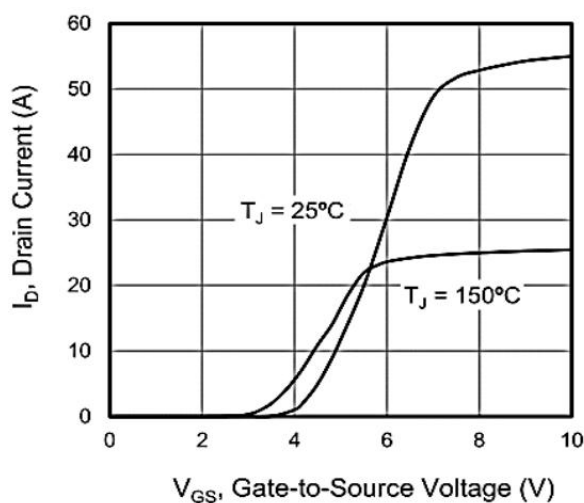


Figure 5. Transfer Characteristics


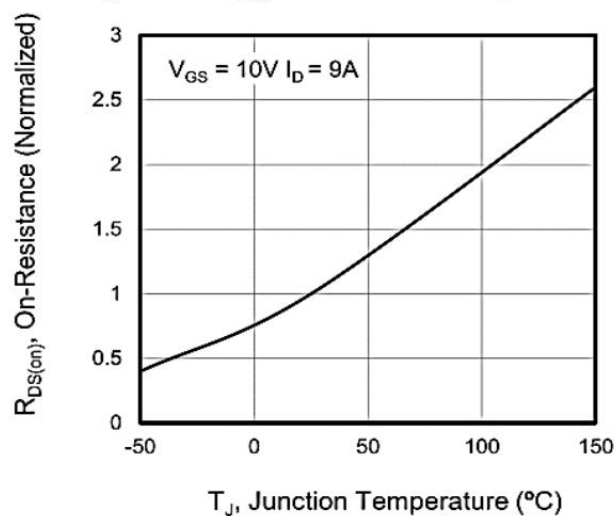



Figure 6. On-Resistance vs. Temperature

Typical Characteristics

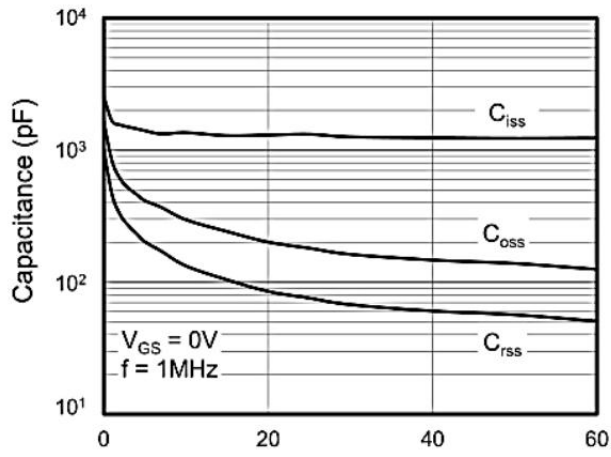

V_{DS} , Drain-to-Source Voltage (V)

Figure 7. Capacitance

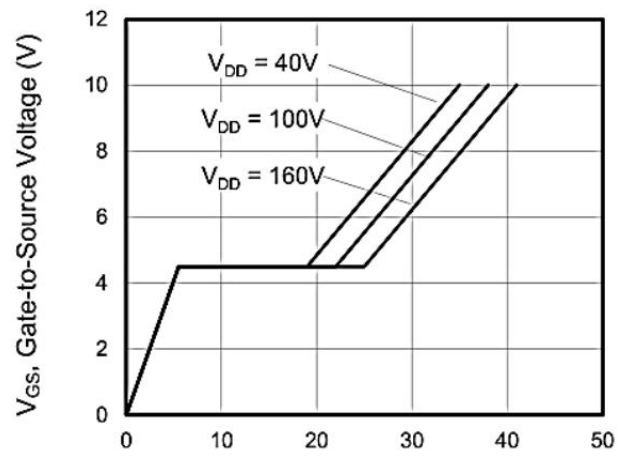

Q_g , Total Gate Charge (nC)

Figure 8. Gate Charge


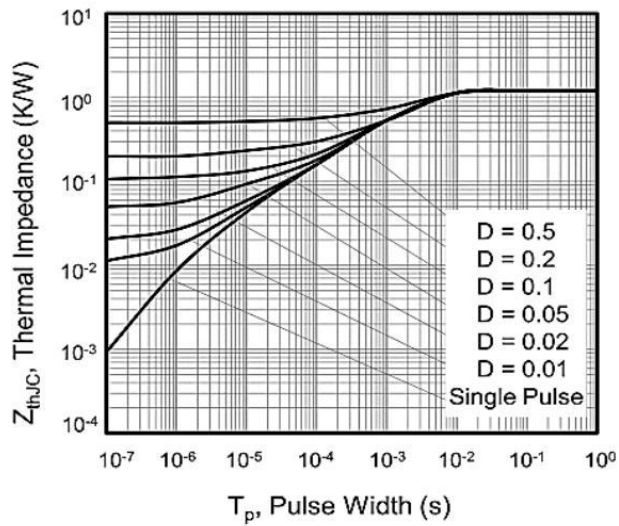


Figure 10. Transient Thermal Impedance

Package Mechanical Data: TO-252-3L

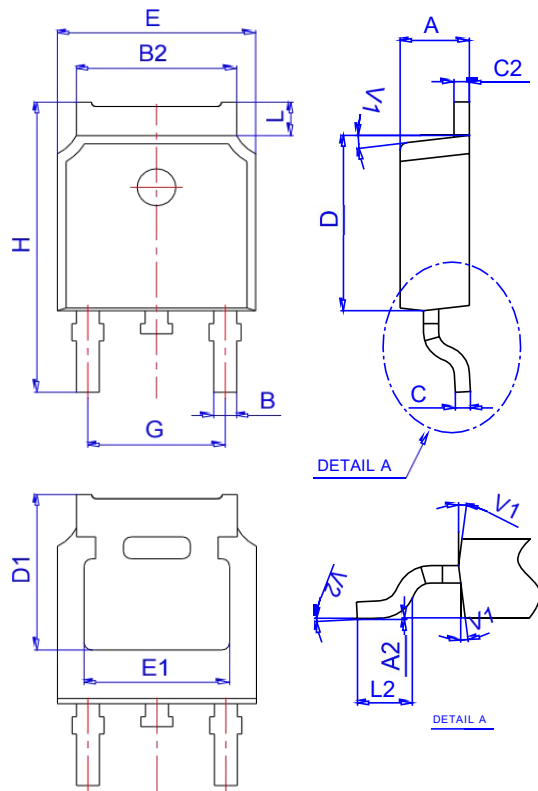

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.10		2.50	0.083		0.098
A2	0		0.10	0		0.004
B	0.66		0.86	0.026		0.034
B2	5.18		5.48	0.202		0.216
C	0.40		0.60	0.016		0.024
C2	0.44		0.58	0.017		0.023
D	5.90		6.30	0.232		0.248
D1	5.30REF			0.209REF		
E	6.40		6.80	0.252		0.268
E1	4.63			0.182		
G	4.47		4.67	0.176		0.184
H	9.50		10.70	0.374		0.421
L	1.09		1.21	0.043		0.048
L2	1.35		1.65	0.053		0.065
V1		7°			7°	
V2	0°		6°	0°		6°

Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
TAPING	TO-252-3L		2500