



	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
✓	3	RE-F-09671	K.N	H.Y	04.04.08	✓				
✓						✓				
✓						✓				
✓						✓				

RECOMMENDED LAND PATTERN DIMENSION OF P.C.B. (MOUNTING SIDE)

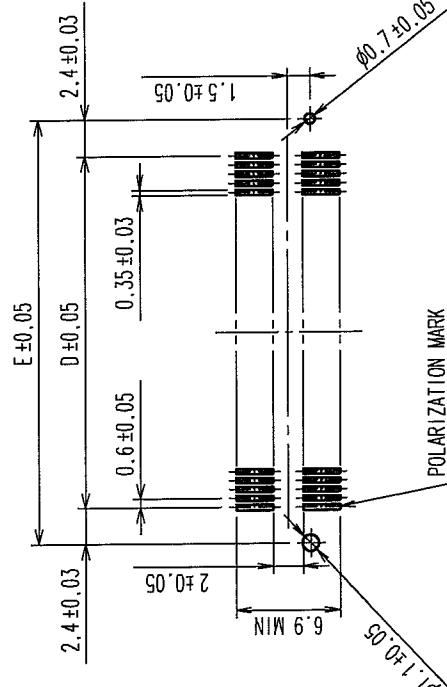

DIMENSION TABLE OF CONNECTOR AND P.C.B. LAND PATTERN.

PART No.	CODE No.		A	B	C	D	E
FX8C-60P-SV4(92)	CL578-0581-8-92	60	24.60	23.00	20.70	17.40	22.20
FX8C-80P-SV4(92)	CL578-0583-3-92	80	30.60	29.00	26.70	23.40	28.20
FX8C-100P-SV4(92)	CL578-0585-9-92	100	36.60	35.00	32.70	29.40	34.20
FX8C-120P-SV4(92)	CL578-0586-1-92	120	42.60	41.00	38.70	35.40	40.20
FX8C-140P-SV4(92)	CL578-0587-4-92	140	48.60	47.00	44.70	41.40	46.20

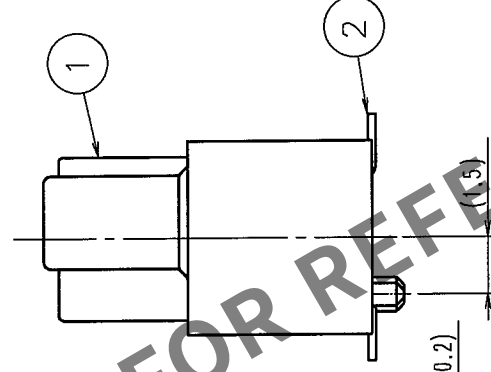

NOTE 1: LEAD CO-PLANARITY SHALL BE 0.1mm MAX.

2. EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.

SEE NEXT PAGE FOR DETAILS

3. FOR MODIFICATION ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.

4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.




4. THE DIMENSIONS IN 1

5. NUMBER OF CONTACTS

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min
					LEAD AREA: TIN-PLATING 1μm min
					UNDER PLATING: NICKEL 1μm min
NO	MATERIAL	FINISH	REMARKS	NO	MATERIAL
					FINISH. REMARKS

NO.	DATE	TIME	NO.	DESIGNED	CHECKED	APPROVED	RELEASED
CODE NO. (OLD)			DRAWN				
CL			S. SUZUKI	K. NAKAMURA	H. OKAWA	Y. YOSHIMURA	
			03.02.04	03.02.12	03.02.14	03.02.15	

	DRAWING NO.	EDC3-151089-22	FX8C-**-P-SV4(92)	PART NO.
	SCALE			
FREE		HIROSE ELECTRIC CO., LTD	CL578	CODE NO.
UNITS	1/2			

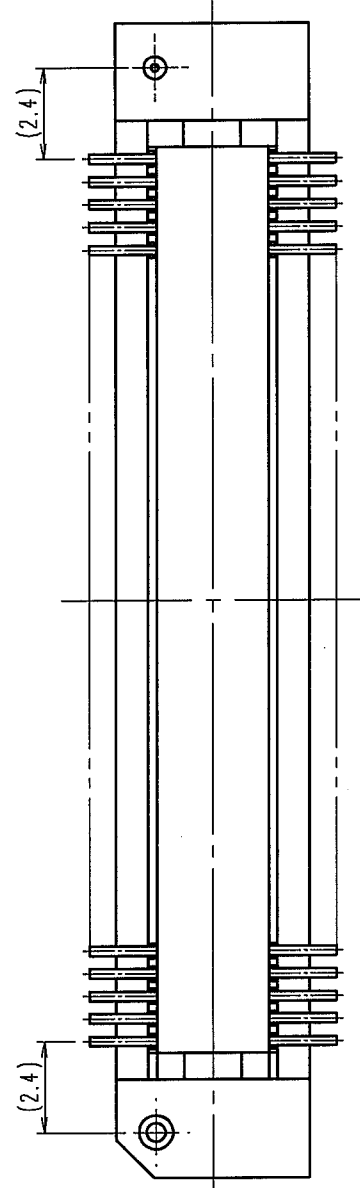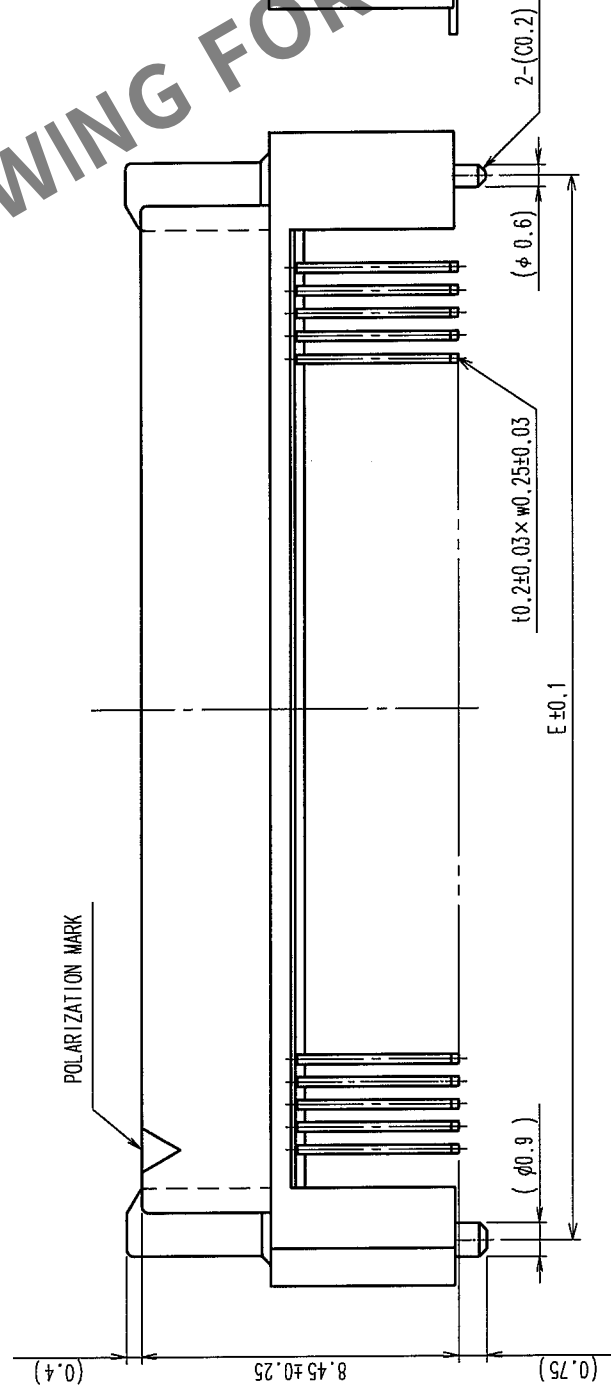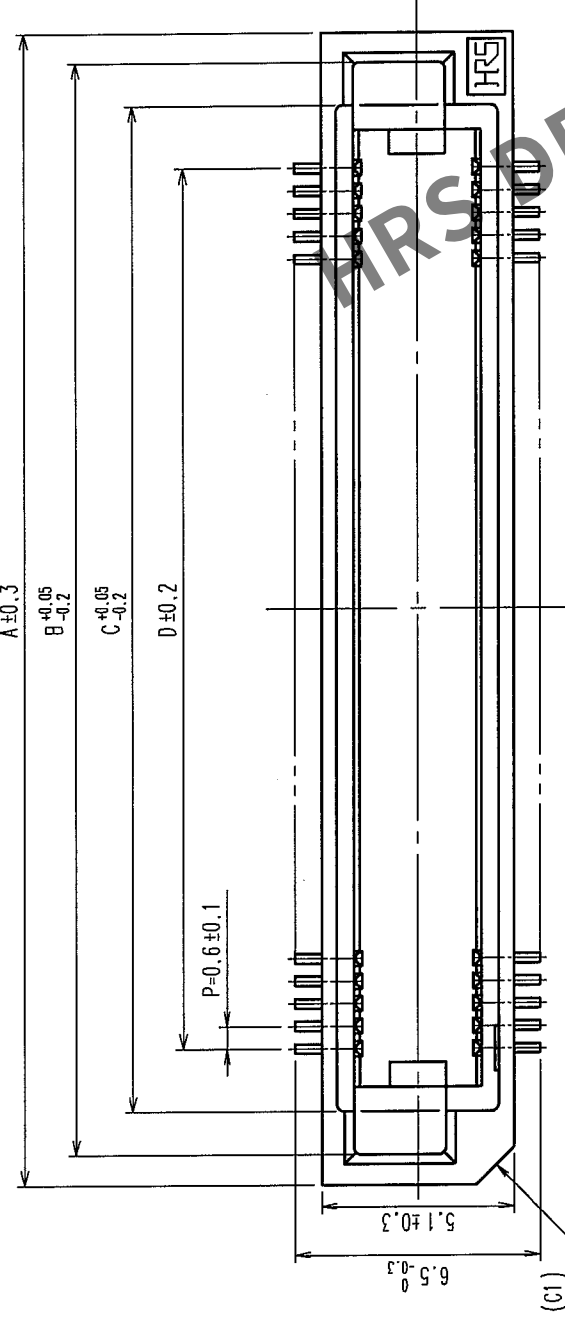

TO	PCK			
----	-----	--	--	--

