




IMPACT

TE Internal #: 2057741-1  
96 Position, Mating Alignment, Guide Pin Mating Alignment Type,  
6 Row, 16 Column, PCB Mount Header, Vertical, IMPACT, High  
Speed Backplane Connectors

[View on TE.com >](#)

Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors

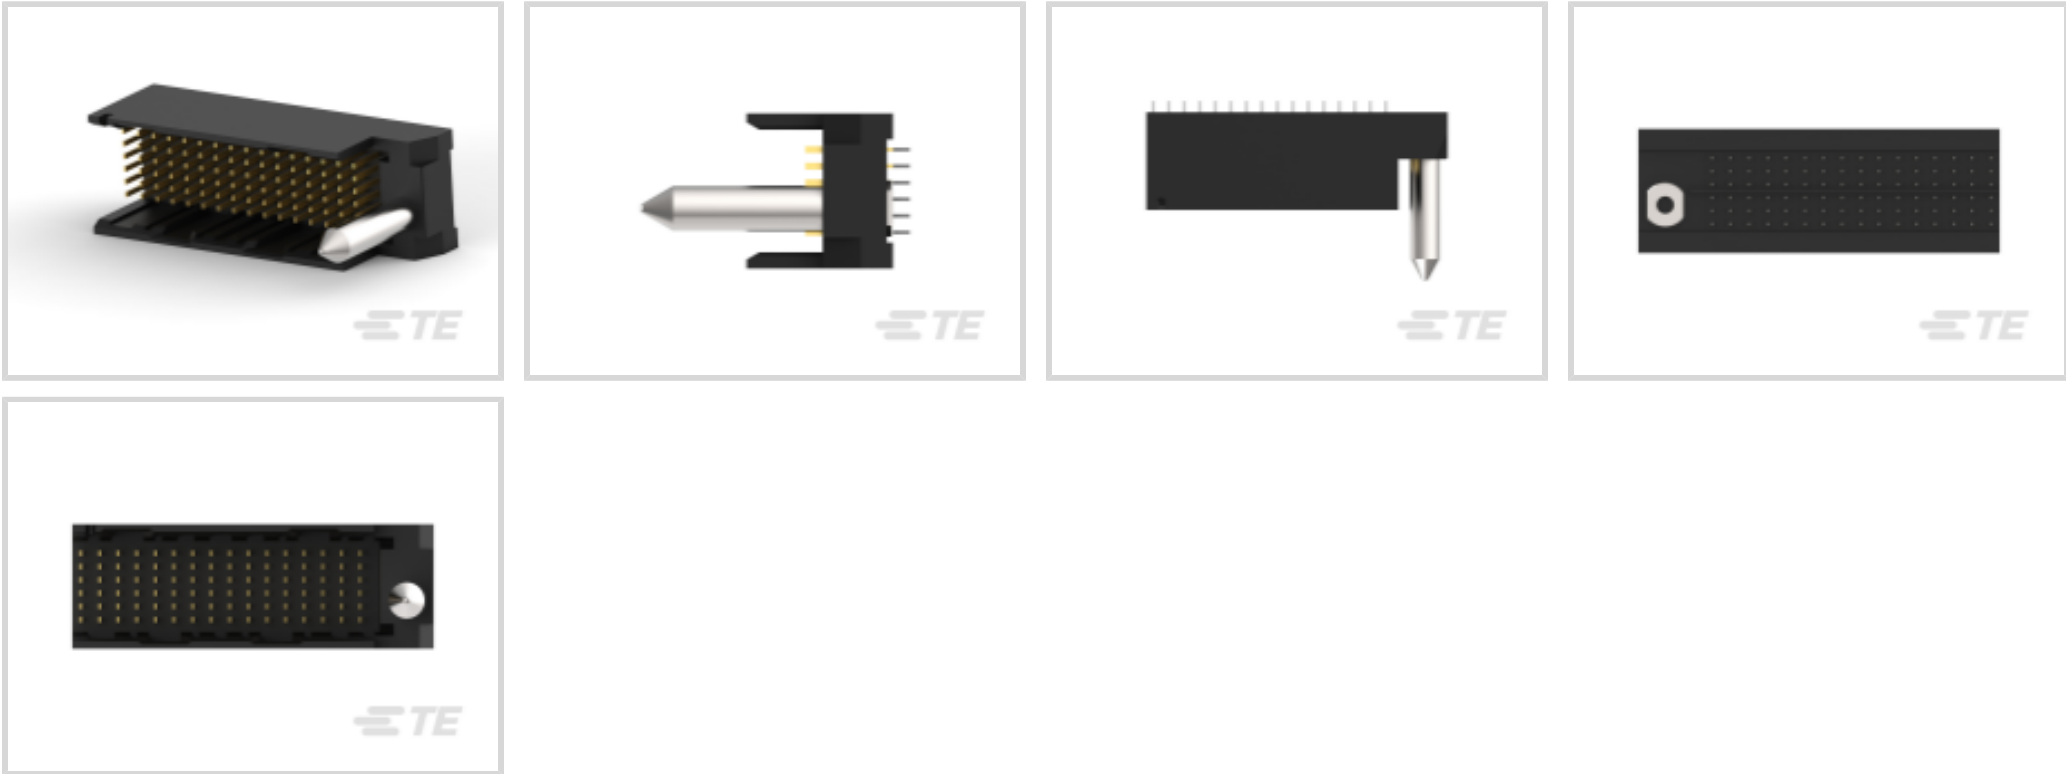

Number of Positions: 96  
Row-to-Row Spacing: 1.35 mm [ .053 in ]  
Mating Alignment: With  
Mating Alignment Type: Guide Pin  
Number of Rows: 6

Features

Product Type Features

Signal Arrangement	Differential
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header
Shroud Style	Partially Shrouded

Configuration Features

Number of Ground Positions	32
Number of Pairs	32
Stackable	No
Number of Signal Positions	64
Number of Positions	96
Number of Rows	6
Number of Columns	16
PCB Mount Orientation	Vertical



Guide Location	Right
Electrical Characteristics	
Operating Voltage	30 VAC
Signal Characteristics	
Number of Differential Pairs per Column	2
Data Rate	25 Gb/s
Body Features	
Primary Product Color	Black
Contact Features	
Contact Mating Area Length	4.5 mm[.177 in]
PCB Contact Termination Area Plating Material Thickness	1.27 µm[50 µin]
Contact Layout	Inline
Contact Type	Pin
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	.76 µm[29.92 µin]
Contact Mating Area Plating Material	Gold
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Dual Beam
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	.75 A
Termination Features	
Termination Post & Tail Length	1.4 mm[.055 in]
Termination Method to PCB	Through Hole - Press-Fit
Mechanical Attachment	
PCB Mount Alignment Type	Locating Posts
Guide Hardware	With
Mating Retention	Without
PCB Mount Retention	With
PCB Mount Retention Type	Action/Compliant Tail & Screw
Mating Alignment	With



Mating Alignment Type	Guide Pin
Connector Mounting Type	Board Mount

Housing Features

Number of Shrouded Sides	2
End Wall Location	Open
Housing Material	LCP (Liquid Crystal Polymer)
Centerline (Pitch)	1.9 mm[.075 in]

Dimensions

Connector Length	36.9 mm[1.453 in]
Connector Height	11.95 mm[.47 in]
Connector Width	12.7 mm[.5 in]
PCB Thickness (Recommended)	1 mm[.039 in]
PCB Hole Diameter	.39 mm[.015 in]
Row-to-Row Spacing	1.35 mm[.053 in]

Usage Conditions

Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Compatible With Approved Standards Products	CSA Certified, UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Method	Box & Tube, Package
------------------	---------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241)



	Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 2057411-1  
IMP100S,R,RA2P16C,UG,39



TE Part # 2018537-1  
TOOL, SEAT 2 PR 16 COL,BP CONN

Also in the Series | IMPACT

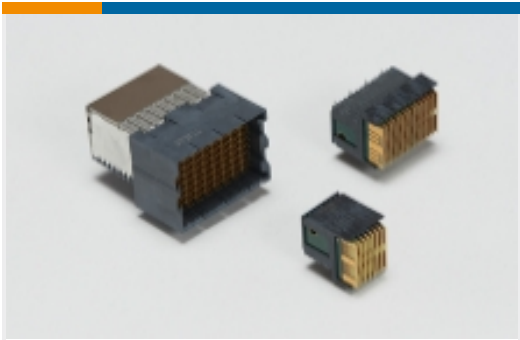

High Speed Backplane Connectors  
(1318)

Customers Also Bought



TE Part #5749111-8  
100 50SR CABLE PLUG ASSY

TE Part #5499922-4  
A/L UNIV HDR 20P VERT LG LAT

TE Part #T4041017031-000  
M8.FMLE.PNLREAR.3POS.STR PCB

TE Part #342101-1  
22-16 F.E.P.G.RING TONGUE NO.6

TE Part #5-5223955-2  
TE UPM Ver Rec 3P HC Power Connector

TE Part #NB-PTCO-166  
Pt100, 2.0x5.0, Class C, PTFD101C1A0

TE Part #5205817-3  
FEMALE SCREWLOCK KIT

TE Part #2383945-7  
TERMI-BLOK SMD MOUNT 180\_7P\_3.81 MM 12A

TE Part #5749081-2  
100 50SR BSHL KT,4-40 J-SC

Documents

Product Drawings

IMP100S,H,V2P16C,RG,OEW39,4.5

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2057741-1\_A\_c-2057741-1-a.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2057741-1\_A\_c-2057741-1-a.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2057741-1\_A\_c-2057741-1-a.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



7-1773458-1\_IMPACT\_BACKPLANE\_CONNECTOR\_SYSTEM\_CATALOG

English

Product Specifications

Application Specification

English

Agency Approvals

Agency Approval Document

English