



P-DUKE POWER

PDL09W Series


DC-DC Converter
Up to 9 Watts

3

YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

c US

CB CE

1600
VDC
Isolation
Voltage

4 : 1
Wide
Input
Range

LOW
Standby
Power

NO
Min. Load
Required

REMOTE
ON
OFF

OCP

SCP

PART NUMBER STRUCTURE

PDL09 -

48

S

05

W

M

Series Name

Input
Voltage
(VDC)

Output
Quantity

Output
Voltage
(VDC)

Input
Range

Case
Options

24:9~36
48:18~75

S: Single

3P3: 3.3
05: 5
09: 9
12: 12
15: 15
24: 24

4 : 1

M: Standard type
Metal case
□: Plastic case

D: Dual

05: ±5
12: ±12
15: ±15

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
PDL09-24S3P3WM	9 ~ 36	3.3	2000	5	82	2600
PDL09-24S05WM	9 ~ 36	5	1600	5	85	1300
PDL09-24S09WM	9 ~ 36	9	1000	5	88	800
PDL09-24S12WM	9 ~ 36	12	750	5	88	560
PDL09-24S15WM	9 ~ 36	15	600	5	89	560
PDL09-24S24WM	9 ~ 36	24	375	9	89	200
PDL09-24D05WM	9 ~ 36	±5	±800	9	86	±800
PDL09-24D12WM	9 ~ 36	±12	±375	9	88	±390
PDL09-24D15WM	9 ~ 36	±15	±300	9	88	±200
PDL09-48S3P3WM	18 ~ 75	3.3	2000	3	82	2600
PDL09-48S05WM	18 ~ 75	5	1600	3	85	1300
PDL09-48S09WM	18 ~ 75	9	1000	3	89	800
PDL09-48S12WM	18 ~ 75	12	750	3	89	560
PDL09-48S15WM	18 ~ 75	15	600	3	89	560
PDL09-48S24WM	18 ~ 75	24	375	3	89	200
PDL09-48D05WM	18 ~ 75	±5	±800	3	85	±800
PDL09-48D12WM	18 ~ 75	±12	±375	3	88	±390
PDL09-48D15WM	18 ~ 75	±15	±300	4	87	±200

INPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom) 48Vin(nom)		9 18	24 48	36 75	VDC
Start up time	Constant resistive load	Power up Remote ON/OFF		50 50		ms
Input surge voltage	1 second, max.	24Vin(nom) 48Vin(nom)			50 100	VDC
Input filter			Capacitor type			
Remote ON/OFF	Referred to –Vin pin	DC-DC ON DC-DC OFF Input current of Ctrl pin Remote off input current		Open or 0 ~ 0.5VDC 3 ~ 12VDC 2 2.5	4 mA mA	

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%
Load regulation	No Load to Full Load	-1.0		+1.0	%
	Single	-1.0		+1.0	%
	Dual	-1.0		+1.0	%
Cross regulation	Asymmetrical load 25%/100% FL	-5.0		+5.0	%
Ripple and noise	20MHz bandwidth		50		mVp-p
	With a 1 μ F/50V X7R MLCC		75		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		250		μ s
Over load protection	% of Iout rated; Hiccup mode		180		%
Short circuit protection					Continuous, automatic recovery

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute Input to Output	1600			VDC
	Input (Output) to Case	1600			VDC
		1000			VDC
Isolation resistance	500VDC	1			G Ω
Isolation capacitance				50	pF
				50	pF
Switching frequency			400		kHz
			500		kHz
Safety approvals	IEC/ EN/ UL62368-1			UL:E193009	
				CB:UL(Demko)	
Case material				Copper	
				Non-conductive black plastic	
Base material				None	
Potting material				Silicone (UL94 V-0)	
Weight				5.9g (0.21oz)	
				4.8g (0.17oz)	
MTBF	MIL-HDBK-217F, Full load			2.939 x 10 ⁶ hrs	
				2.696 x 10 ⁶ hrs	


ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+100	°C
Maximum case temperature				100	°C
Storage temperature range		-55		+125	°C
Thermal shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity				5% to 95% RH	


EMC SPECIFICATIONS		
Parameter	Conditions	Level
EMI	EN55032 With external components	Class A + Class B
EMS	EN55024	
ESD	EN61000-4-2 Air $\pm 8\text{kV}$ and Contact $\pm 6\text{kV}$	Perf. Criteria A
Radiated immunity	EN61000-4-3 20 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 $\pm 2\text{kV}$	Perf. Criteria A
	PDL09-24□□□W With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220 μF /100V) and a TVS(SMDJ70A, 70V, 3000Watt peak pulse power) in parallel.	
	PDL09-48□□□W With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220 μF /100V) and a TVS (SMDJ120A, 120V, 3000Watt peak pulse power) in parallel.	
Surge	EN61000-4-5 $\pm 2\text{kV}$	Perf. Criteria A
	PDL09-24□□□W With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220 μF /100V) and a TVS(SMDJ70A, 70V, 3000Watt peak pulse power) in parallel.	
	PDL09-48□□□W With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220 μF /100V) and a TVS (SMDJ120A, 120V, 3000Watt peak pulse power) in parallel.	
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

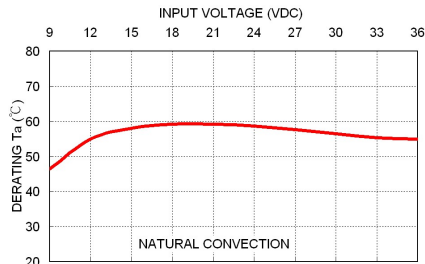


PDL09-24D12W Derating Ta v.s. Input Voltage (at Full Load)

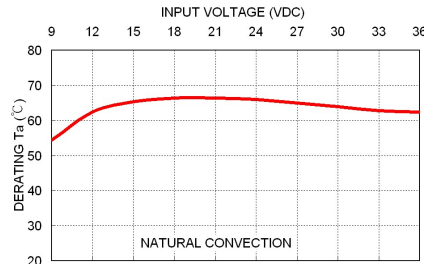


PDL09-24D12WM Derating Ta v.s. Input Voltage (at Full Load)

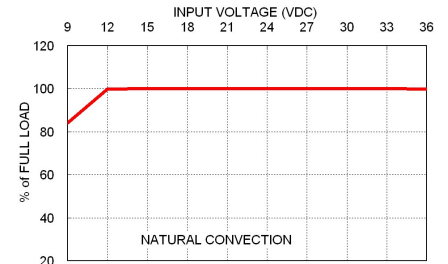


PDL09-24D12W Load Derating v.s. Input Voltage (at Ta=55°C)

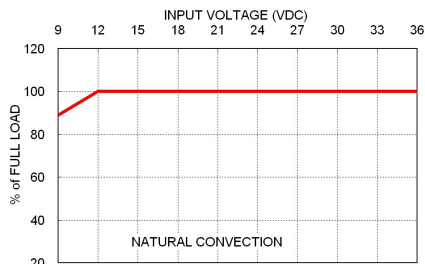


PDL09-24D12WM Load Derating v.s. Input Voltage (at Ta=60°C)

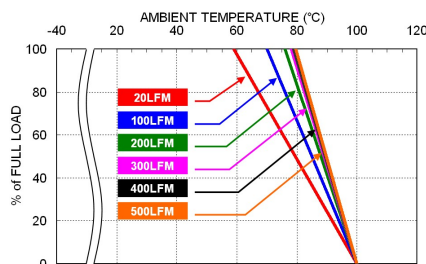


PDL09-24D12W Derating Curve

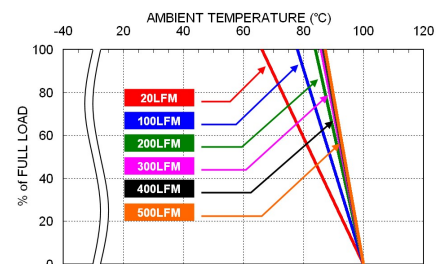

PDL09-24D12WM Derating Curve

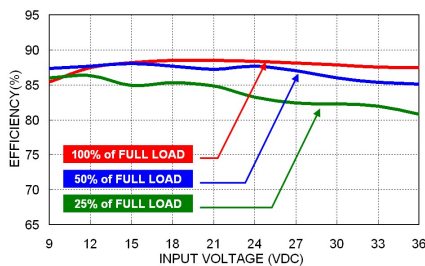

PDL09-24D12W Efficiency vs. Input Voltage

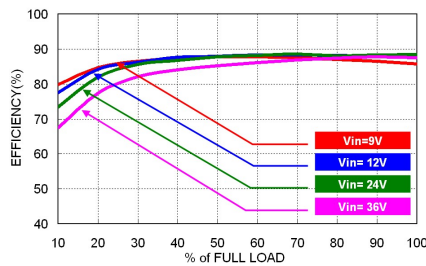

PDL09-24D12W Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
PDL09-24S□□W、PDL09-24D□□W	3.15	Slow-Blow
PDL09-48S□□W、PDL09-48D□□W	1.25	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

Standard type Metal Case

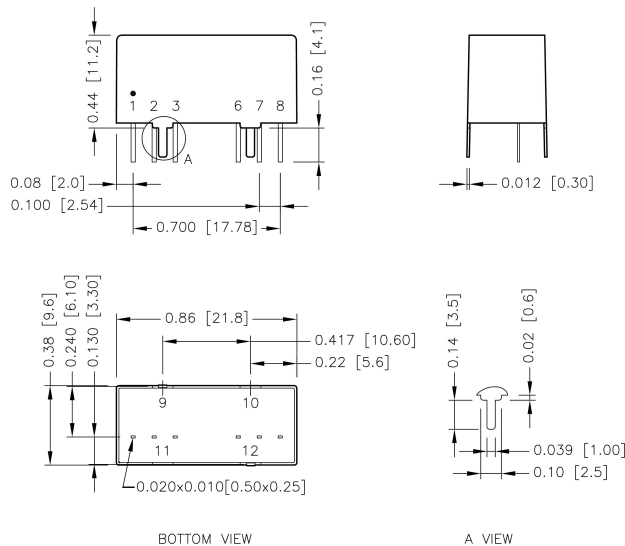


PIN CONNECTION

PIN	SINGLE	DUAL
1	-Vin	-Vin
2	+Vin	+Vin
3	Ctrl	Ctrl
6	+Vout	+Vout
7	-Vout	Common
8	NC	-Vout
9	Case	Case
10	Stand off	Stand off
11	Stand off	Stand off
12	Case	Case

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]

Plastic Case

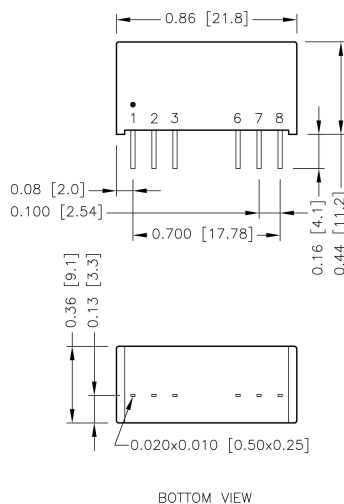


PIN CONNECTION

PIN	SINGLE	DUAL
1	-Vin	-Vin
2	+Vin	+Vin
3	Ctrl	Ctrl
6	+Vout	+Vout
7	-Vout	Common
8	NC	-Vout

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]


RECOMMENDED PAD LAYOUT

Standard type Metal Case

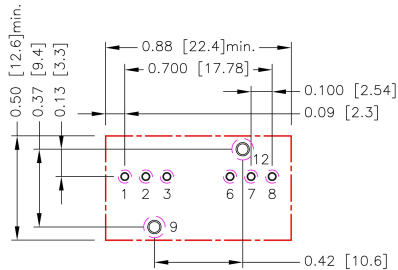

All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.6.7.8: $\Phi 0.031$ [0.80]
 Through hole 9.12: $\Phi 0.051$ [1.30]
 Top view pad 1.2.3.6.7.8: $\Phi 0.039$ [1.00]
 Top view pad 9.12: $\Phi 0.064$ [1.63]
 Bottom view pad 1.2.3.6.7.8: $\Phi 0.063$ [1.60]
 Bottom view pad 9.12: $\Phi 0.102$ [2.60]

Plastic Case

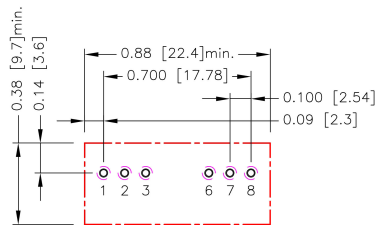


All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.6.7.8: $\Phi 0.031$ [0.80]
 Top view pad 1.2.3.6.7.8: $\Phi 0.039$ [1.00]
 Bottom view pad 1.2.3.6.7.8: $\Phi 0.063$ [1.60]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding Environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).



TOP VIEW