



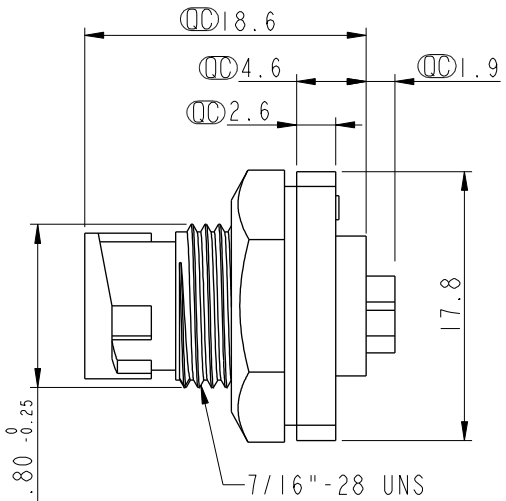


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190268	2019/02/18	Ruru	Modify Note



Pin Assignments
Front View

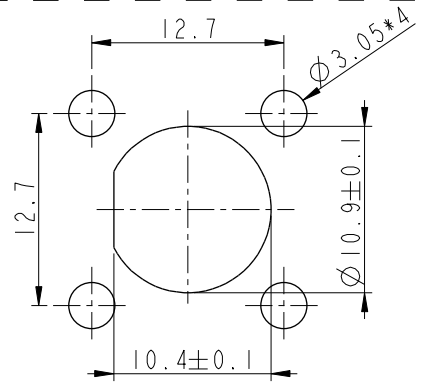

Recommended Panel Cut-Out

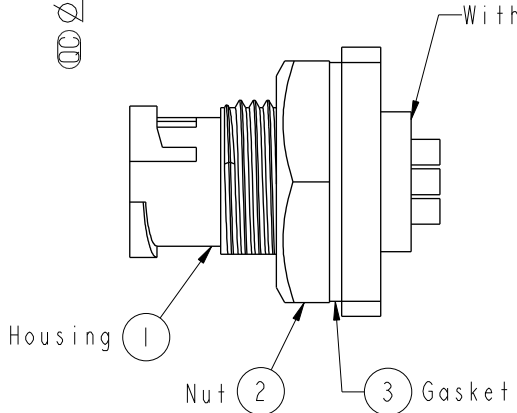

Note: Important Dimension.

- * Important Dimension.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Shield: Metal, Nickel Plated
- * Nut: Metal, Nickel Plated
- * Gasket: Rubber, Black
- * Use with waterproof cap or dust cap
Panel Thickness Max. 2.5mm.
- * Use without waterproof cap or dust cap
Panel Thickness Max. 3.5mm.
- * Gasket and Nut are packed separately
in PE bags.

UNIT:mm				TITLE		ITEM NO		DRAWN BY		DATE	
TOLERANCE		.X ±0.25		Mini		ASU-06PMMS-LS7002		Ruru		2019-02-18	
.XX ±0.1		SCALE		Panel Lock 6Pin M Conn. M Pin		DWG NO		CHECKED BY		DATE	
.XXX ±0.05		2:1		SIZE		ASU-06PMMS-LS7002		Rita		2019-02-18	
ANGLES ±1°		REV.		WC-REV.		CUSTOMER		APPROVED BY		DATE	
		B		A.1		ALTW		Max		2019-02-18	

Amphenol LTW
安費諾亮泰企業股份有限公司