

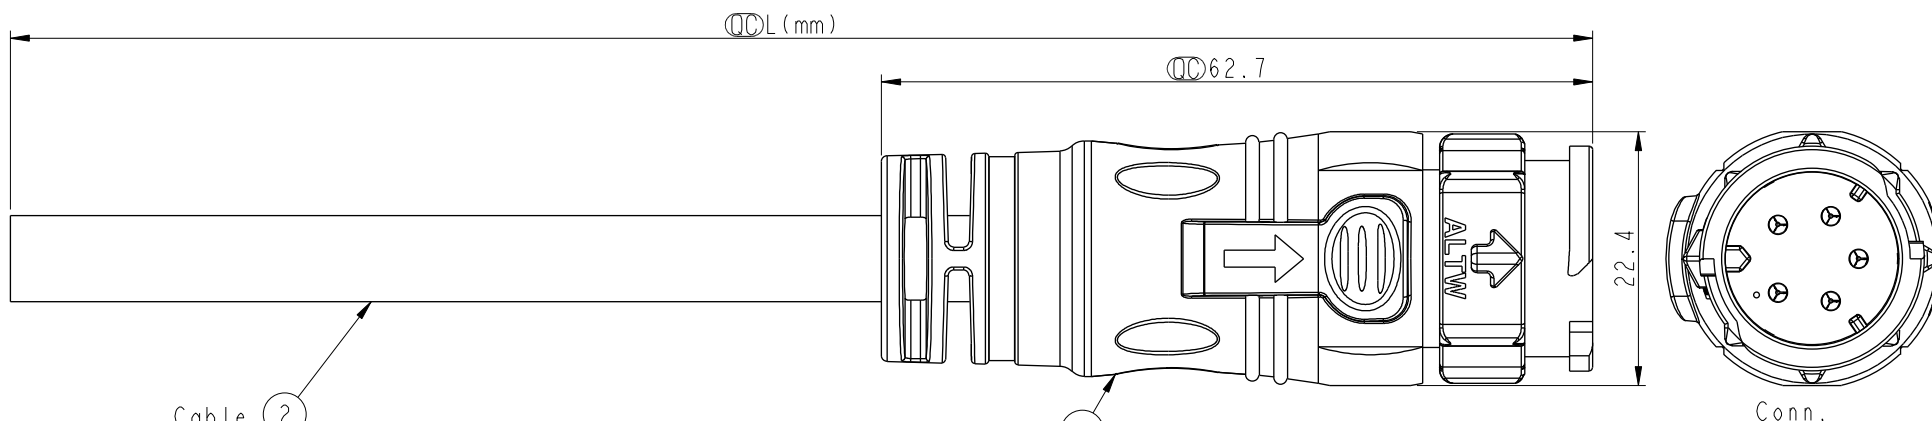


REV.	ECN NO.	DATE	SIGN	DESCRIPTION



CB-05AMMM-QL8W00
Color: Black



Pin Assignments
Front View

5	Yellow	黃
4	Orange	橙
3	Red	紅
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
Pin Out		


CB-05AMMM-QL8DXX

XX :01~99Meters
01 :01Meter
02 :02Meters
:
:
99 :99Meters

Note:

- * $\varnothing$ Important Dimension To Check.
- * Working Voltage Rating: AC 300 V
- * Working Current Rating: 10A
- * Flame Class: UL94V-0 (UV Resistance)
- * Waterproof Rate: IP68(Mated).
- * Housing: Nylon+GF, Black.
- * Male Pin: Copper Alloy, Gold Plated
- * Cable: UL21388 16AWG*5C+AL.Mylar Black,PVC Jacket UV Resistant, OD=7.6
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm
TOLERANCE
±0.5



TITLE
X Lok C-Size
Cable 5Pin 10A M Conn. M Pin

SCALE 3:2	SIZE A4	SHEET 1 OF 1
REV. A	WC-REV. A.2	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Micky	DATE 2014-11-18
DWG NO CB-05AMMM-QL8DXX	CHECKED BY Spring	DATE 2014-11-18
CUSTOMER ALTW	APPROVED BY Kevin	DATE 2014-11-18