
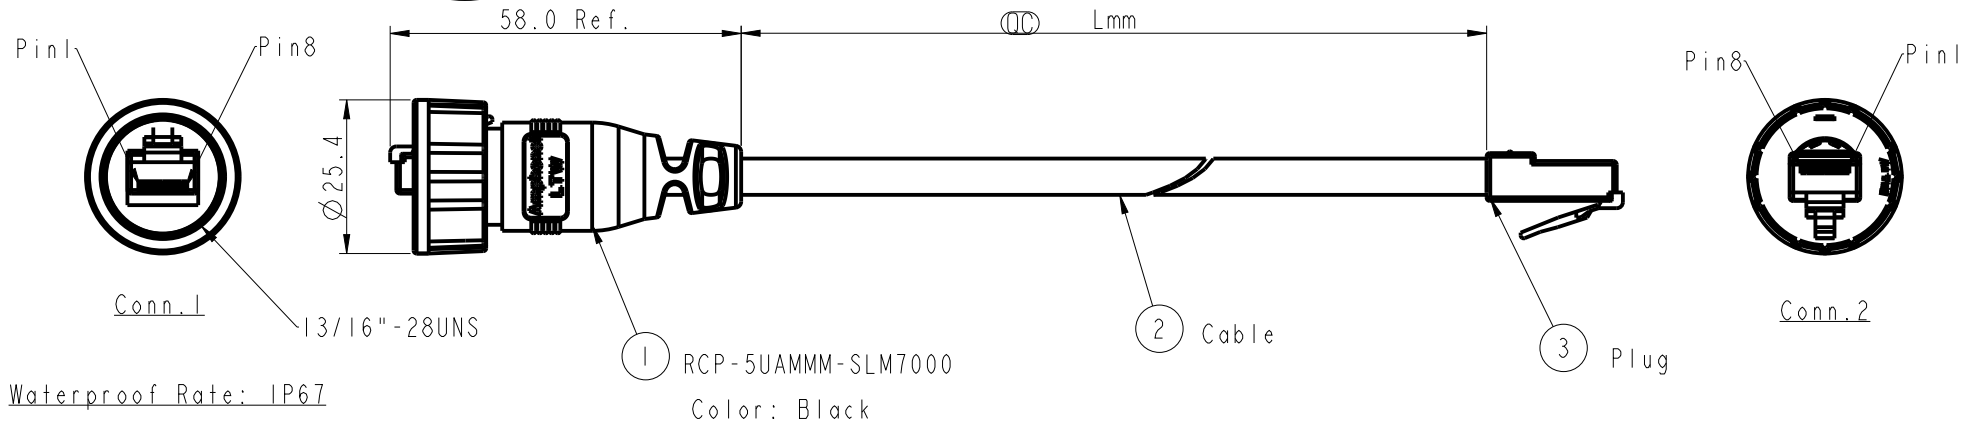


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C200002	2019-12-30	Wesley Lin	△*1



RCP5UM-UPG06M-SL7A XX

XX : 01~99Meters
01 : 01Meter
02 : 02Meters

99 : 99Meters

Cable Length(L): 01~99Meters

Note:

- * (QC) Important Dimension To Check
- * Waterproof Rate: IP67 (Mating)
- * Housing: Nylon+GF, Black
- * Screw Nut: Nylon+GF, Black
- * RJ Plug: Unshield, Phosphor Bronze, Gold Plated
- * Cable: NOUL, CAT5E UTP 24#*4P, OD6.0, Black
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
11M~30M: ±200mm
31M~99M: ±500mm

8	Brown	棕	8	Twist
7	White/Brown	白/棕	7	
6	Green	綠	6	
5	White/Blue	白/藍	5	Twist
4	Blue	藍	4	Twist
3	White/Green	白/綠	3	
2	Orange	橘	2	Twist
1	White/Orange	白/橘	1	
Conn.1	Wire Color		Conn.2	

Pin Out

UNIT: mm		TITLE	RJ DOUBLE-ENDED, WITH PLUG 13/16"-28UNS
TOLERANCE .X	±0.5	SCALE	4:5
		SIZE	A4
		SHEET	1 OF 1
REV.	B	WC-REV.	.0
		(QC)	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	RCP5UM-UPG06M-SL7AXX	ALTW	Raison_Liao	Tony	Victor	2013-09-02
						2013-09-02
						2013-09-02

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.