



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	CI90871	2019/05/31	JC Chen	Description content change
C	CI91395	2019/07/29	JC Chen	Dimensional tolerance change
D	CI91828	2019/10/22	JC Chen	$\triangle$ XI

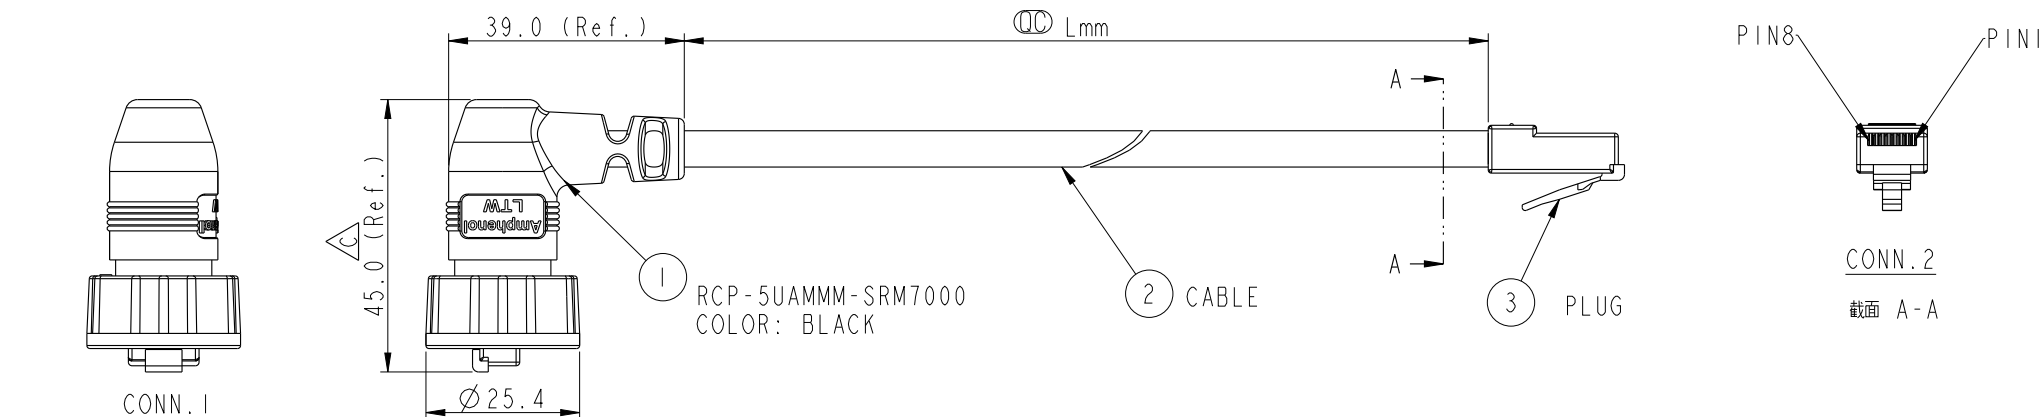

Waterproof Rate: IP67

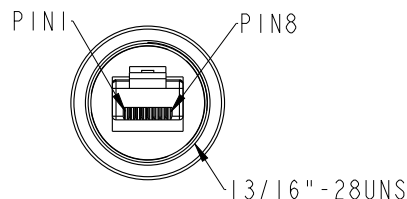

RCP5UM-UPG06M-SR7A XX

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
99 : 99Meters

Cable Length(L): 01~99Meters

Note:
* $\odot$ Important Dimension To Check
* Waterproof Rate: IP67 (Mating)
* Screw Nut: Nylon+GF, Black
* RJ Plug: Unshield, Phosphor Bronze, Gold Plated
* Cable: NOUL, CAT5E UTP 24#*4P, OD6.0, Black
* Cable Length Tolerance: 01M: ± 40 mm
02M~05M: ± 60 mm
11M~30M: ± 200 mm
31M~99M: ± 500 mm

8	BROWN	棕	8
7	WHITE/BROWN	白/棕	7
6	GREEN	綠	6
5	WHITE/BLUE	白/藍	5
4	BLUE	藍	4
3	WHITE/GREEN	白/綠	3
2	ORANGE	橘	2
1	WHITE/ORANGE	白/橘	1
Conn.1	Wire Color		Conn.2
	PIN OUT		

UNIT:mm		TITLE	RJ DOUBLE-90 ENDED, WITH PLUG 13/16"-28UNS	
TOLERANCE	.X ± 0.5	SCALE	4:5	SIZE A4
REV.	D	WC-REV.	A.4	SHEET 1 OF 1
				$\odot$ Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	JC Chen	2019-07-29
RCP5UM-UPG06M-SR7A XX	CHECKED BY	DATE
	Li Feng	2019-07-29
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2019-07-29