
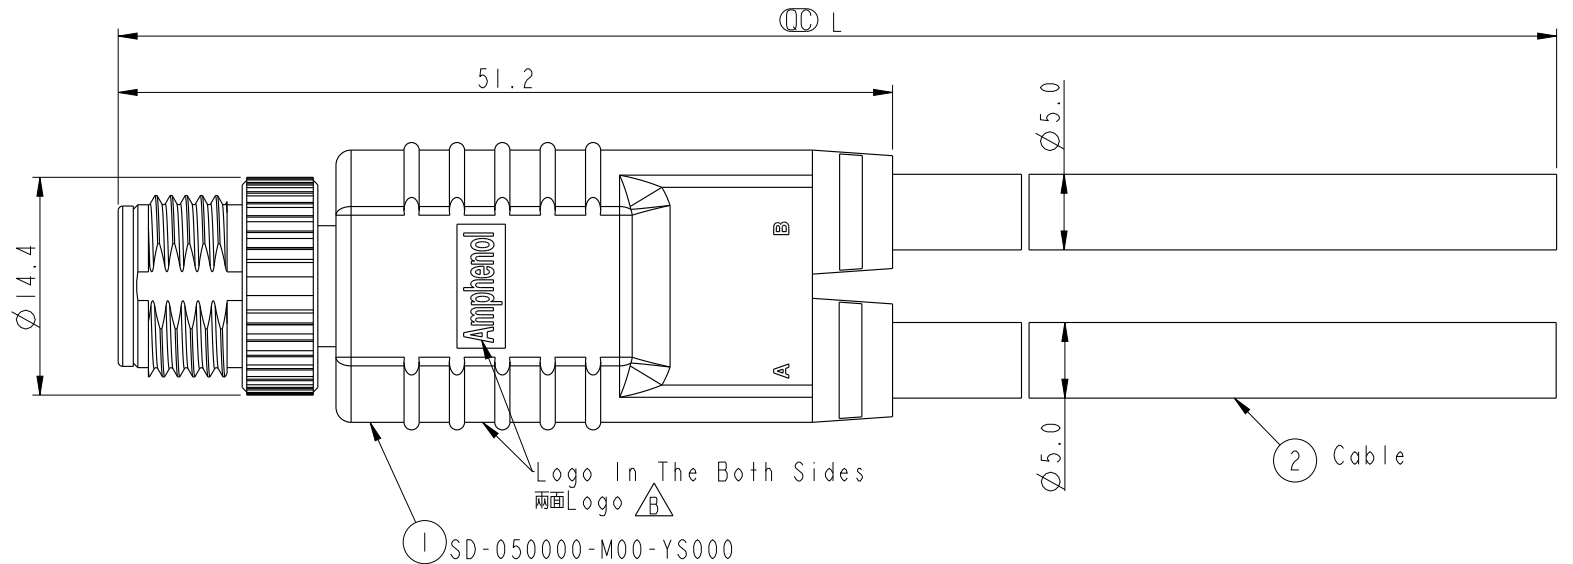


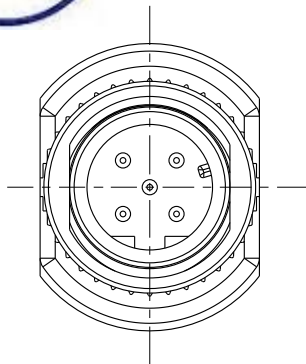

Logo In The Both Sides
两面Logo

SD-050000-M00-YS000
Color: Black

SD-050000-M00-YSBXX


XX:01~99Meter
01:01Meter
02:02Meters

Note:

- * Important Dimension To Check.
- * Waterproof Rate: IP68.
- * IP68: 1M Depth Of Water In 24hours.
- * Housing: PU, Black.
- * Male Pin: Phosphor Bronze, Gold Plated
- * O-Ring: Viton, Green
- * Screw Nut: Zn Alloy, Nicked Plated
- * Cable: NO HALOGEN 22AWG*5C+T, Black, PU Jacket, UV Resistant, OD=5.0mm
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

Cable Length(L): 01~99Meters

ALTW
CONFIDENTIAL
2013-06-01
R&D DEPT.



Pin Assignments
Front View 前視圖

5	Green	綠	Green	綠
4	Black	黑	Black	黑
3	Blue	藍	Blue	藍
2	White	白	White	白
1	Brown	棕	Brown	棕
	A		B	
Conn.	Wire Color		Pin Out	

UNIT:mm
TOLERANCE
±0.5mm

TITLE
M12 D 5Pin M Conn. M Pin,Y Cable
SCALE 2:1
REV. B
SIZE A4
WC-REV. A.2
SHEET 1 OF 1
QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	SD-050000-M00-YSBXX	ALTW	Cary_liu	Tom_gu	Victor	2013-06-01